cannondale

2020



Contents

- ROAD 02
- MOUNTAIN 44
- URBAN/FITNESS 74
 - ELECTRIC 96
 - KIDS' 118
 - GEAR 132



Road

RACE ENDURANCE GRAVEL



Road Line-Up

Race



Endurance



SYNAPSE HI-MOD

SYNAPSE CARBON



Gravel



SystemSix



Category Road | Race

Sizes

Men's: 47, 51, 54, 56, 58, 60, 62cm Wheel / Tire Size 700 x26mm (23c)

Faster Everywhere

The fastest UCI-legal road bike in the world. More speed with less effort. Simple as that.

Key Features

Simply the Fastest

SystemSix produces the least aerodynamic drag of any road bike on the market, which helps any rider go faster, easier.

Seriously — It's So Fast

SystemSix outstrips opponents, and not just where you'd expect. It sprints, descends and even climbs most hills faster, conserving watts off the front, in the draft, or in the laughing group.

A Sweet Ride-Feel, Too

SystemSix maximizes the benefits of disc brakes, big volume tires and EVO-inspired geometry. Dramatic drag reduction. Great handling. Explosive performance. Make the most of the watts you've got.





SystemSix Hi-MOD Red eTap AXS

RRP \$13999 C11200M BallisTec Hi-MOD Carbon, integrated cable routing w/ Switchplate, SRAM XG-1290, 10-28, 12-speed Frame Rear Cogs SAVE, PF30a, flat mount disc, 142×12 Speed Release thru-axle Front Derailleur SRAM RED eTap AXS, braze-on BallisTec Hi-MOD Carbon, 1-1/8" - 1-1/4" steerer, Fork Rear Derailleur SRAM RED eTap AXS 12×100mm Speed Release thru-axle, flat mount disc, Shifters SRAM RED eTap AXS HRD, 2×12 55mm offset (47-51cm) 45mm offset (54-62cm) Handlebar HollowGram SystemBar KNØT, alloy w/ cable cover Rims HollowGram 64 SL KNØT, Carbon, 20h front, 24h Grips Cannondale Grip Bar Tape w/Gel, 3.5mm rear, 64mm deep, 21mm ID, tubeless ready Stem HollowGram Stem KNØT, alloy w/ cable cover, -17° Hubs (F) HollowGram KNØT, sealed bearing 12×100 Tapered, 1-1/8" upper, 1-1/4" lower bearing Headset centerlock / (R) HollowGram KNØT. 12×142 centerlock Brakes SRAM RED eTap AXS HRD, 160/160mm Centerlock rotors w/ DT Swiss internals, SRAM XDR driver Brake Levers SRAM RED eTap AXS HRD DT Swiss Aerolite, straight pull Spokes Saddle Prologo Dimension NDR, 143mm width, Tirox rails Vittoria Rubino Pro Speed, 700 × 26mm (23c) Tires Seatpost HollowGram 60 KNØT Carbon, 330mm Pedals Not Included SRAM RED Carbon, 48/35 Connectivity Wheel Sensor Crank 51, 54, 56, 58, 60, 62 Bottom Bracket SRAM RED DUB PF30 Sizes Color 1 Champagne (CHP) Chain SRAM RED, 12-speed

SystemSix Carbon Ultegra Di2

rrp \$8999



Frame	BallisTec Carbon, integrated cable routing w/ Switchplate, SAVE, PF30a, flat mount disc, 142×12 Speed Release thru-axle
Fork	BallisTec Carbon, 1-1/8" - 1-1/4" steerer, 12×100mm Speed Release thru-axle, flat mount disc, 55mm offset (47-51cm) 45mm offset (54-62cm)
Rims	HollowGram 64 SL KNØT, Carbon, 20h front, 24h rear, 64mm deep, 21mm ID, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100 centerlock / (R) HollowGram KNØT, 12×142 centerlock w/ DT Swiss internals
Spokes	DT Swiss Aerolite, straight pull
Tires	Vittoria Rubino Pro Speed, 700 × 26mm (23c)
Pedals	Not Included
Crank	HollowGram, BB30a w/ OPI SpideRing, 52/36
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG701, 11-speed

Rear Cogs	Shimano Ultegra, 11-30, 11-speed
Front Derailleur	Shimano Ultegra Di2, braze-on
Rear Derailleur	Shimano Ultegra Di2
Shifters	Shimano Ultegra Di2 hydro disc, 2×11
Handlebar	HollowGram SystemBar KNØT, alloy w/ cable cover
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Stem	HollowGram Stem KNØT, alloy w/ cable cover, -17°
Headset	Tapered, 1-1/8" upper, 1-1/4" lower bearing
Brakes	Shimano Ultegra Di2 hydro disc, 160/140mm RT800 rotors
Brake Levers	Shimano Ultegra Di2 hydro disc
Saddle	Prologo Dimension NDR, 143mm width, Tirox rails
Seatpost	HollowGram 60 KNØT Carbon, 330mm
Connectivity	Wheel Sensor
Sizes	47, 51, 54, 56, 58, 60
Color 1	Team Replica (REP)

C11300M

SuperSix EVO



Category Road | Race

Sizes

Men's: 48, 50, 52, 54, 56, 58, 60, 62cm Wheel / Tire Size

Fly

A pure road bike. Light, smooth and ultra fast. The evolution of the classic race machine.

Key Benefits

Less Drag. More Speed.

30 watts. That's how much power the drag-reducing tube shapes and integrated design of the new SuperSix EVO saves over the prior version at 30 mph (48.3 km/h). Fast just got faster.

Feel the Light

The lightest disc brake road frameset we've ever made. The new SuperSix EVO is ready to throw down when the grade goes up.

Swift and Sure

Racy geometry and stiffness for explosive speed. Better microsuspension and big tire clearance for surprising smoothness. It all adds up to precise handling and a ride-feel that's out of sight.



SuperSix EVO Hi-MOD Disc Dura Ace Di2

rrp **\$12999**

			С11150М
Frame	All-New, BallisTec Hi-MOD Carbon, integrated cable	Chain	Shimano Dura-Ace, 11-speed
	routing w/ Switchplate, 142×12 Speed Release thru-axle,	Rear Cogs	Shimano Dura-Ace, 11-30, 11-speed
	SAVE, PF30a, flat mount disc, integrated seat binder	Front Derailleur	Shimano Dura-Ace Di2, braze-on
Fork	All-New, BallisTec Hi-MOD Carbon, SAVE, 1-1/8" to	Rear Derailleur	Shimano Dura-Ace Di2
	1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing,	Shifters	Shimano Dura-Ace hydro disc, 2×11
	55mm offset (47-54cm) 45mm offset (56-62cm)	Handlebar	HollowGram SystemBar SAVE, Carbon, 8 deg. pitch adjust
Rims	HollowGram 45 SL KNØT, Carbon, 20h front, 24h	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
	rear, 45mm deep, 21mm ID, tubeless ready	Stem	All-New HollowGram KNØT, alloy w/ cable cover, -6°
Hubs	(F) HollowGram KNØT, sealed bearing 12×100 centerlock / (R)	Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap
	HollowGram KNØT, 12×142 centerlock w/ DT Swiss internals	Brakes	Shimano Dura Ace Di2 hydro disc, 160/140mm RT900 rotors
Spokes	DT Swiss Aerolite	Brake Levers	Shimano Dura-Ace hydro disc
Tires	Vittoria Corsa, 700 × 25c	Saddle	Prologo Dimension Nack NDR, 143mm width, carbon rails
Pedals	Not Included	Seatpost	All-New HollowGram 27 SL KNØT, carbon, 2 bolt clamp, 330mm
Crank	HollowGram SiSL2 w/ pre-installed power2max NG Eco	Connectivity	Wheel Sensor
	Power Meter (not activated), BB30a, Vision rings, 52/36	Sizes	48, 51, 54, 56, 58, 60
Bottom Bracket	Cannondale Alloy PressFit30	Color 1	Black (BLK)

SuperSix EVO Hi-MOD Disc Ultegra Di2

Super		JIADIZ	
RRP \$9999		cannond	
Frame	All-New, BallisTec Hi-MOD Carbon, integrated cable	Chain	Shimano HG701, 11-speed
	routing w/ Switchplate, 142×12 Speed Release thru-axle,	Rear Cogs	Shimano 105, 11-30, 11-speed
	SAVE, PF30a, flat mount disc, integrated seat binder	Front Derailleur	Shimano Ultegra Di2, braze-on
Fork	All-New, BallisTec Hi-MOD Carbon, SAVE, 1-1/8" to	Rear Derailleur	Shimano Ultegra Di2
	1-1/4" steerer, integrated crown race, 12×100mm Speed	Shifters	Shimano Ultegra Di2 hydro disc, 2×11
	Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)	Handlebar	HollowGram SystemBar SAVE, Carbon, 8 deg. pitch adjust
Rims	HollowGram 45 SL KNØT, Carbon, 20h front, 24h	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
niiis	rear, 45mm deep, 21mm ID, tubeless ready	Stem	All-New HollowGram KNØT, alloy w/ cable cover, -6°
Hubs	(F) HollowGram KNØT, sealed bearing 12×100 centerlock / (R)	Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap
11455	HollowGram KNØT, 12×142 centerlock w/ DT Swiss internals	Brakes	Shimano Ultegra Di2 hydro disc, 160/140mm RT70 rotors
Spokes	DT Swiss Aerolite	Brake Levers	Shimano Ultegra Di2 hydro disc
Tires	Vittoria Corsa, 700 × 25c	Saddle	Prologo Dimension NDR, 143mm width, Tirox rails
Pedals	Not Included	Seatpost	All-New HollowGram 27 SL KNØT, carbon, 2 bolt clamp, 330mm
Crank	HollowGram w/ pre-installed power2max NG Eco Power	Connectivity	Wheel Sensor
-	Meter (not activated), BB30a, FSA rings, 52/36	Sizes	48, 51, 54, 56, 58, 60, 62
			- · · · />

Color 1

Carbon (CRB)

Bottom Bracket Cannondale Alloy PressFit30

cannondale

SuperSix EVO Carbon Disc Force eTap AXS

RRP \$7499

Frame	All-New, BallisTec Carbon, integrated cable routing w/ Switchplate, 142×12 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	All-New, BallisTec Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)
Rims	HollowGram 35, Carbon Clincher Disc, 19mm inner, 35mm deep, tubeless ready
Hubs	(F) Cannondale HollowGram Sealed Bearing, straight pull, 12×100 / (R) Cannondale HollowGram Sealed Bearing, straight pull, 12×142
Spokes	Formula Grand Forza
Tires	Vittoria Rubino Pro Bright Black, 700 × 25c
Pedals	Not Included
Crank	SRAM Force eTap AXS
Bottom Bracket	SRAM PF30
Chain	SRAM Force eTap AXS, 12-speed

		C11450M	
Rear Cogs	SRAM XG-1270, 10-33, 12-speed		
Front Derailleur	SRAM Force eTap AXS, braze-on		
Rear Derailleur	RAM Force eTap AXS		
Shifters	RAM Force eTap AXS HRD, 2×12		
Handlebar	llowGram SystemBar SAVE, Carbon, 8 deg. pitch adjust		
Grips	nnondale Grip Bar Tape w/Gel, 3.5mm		
Stem	All-New HollowGram KNØT, alloy w/ cable cover, -6°		
Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap		
Brakes	SRAM Force eTap AXS, 160/160mm Centerlock rotors		
Brake Levers	SRAM Force eTap AXS		
Saddle	Prologo Dimension STN NDR, steel rails		
Seatpost	All-New HollowGram 27 SL KNØT, carbon, 2 bolt clamp, 33	0mm	
Connectivity	Wheel Sensor		
Sizes	44, 48, 51, 54, 56, 58, 60		
Color 1	Cashmere (CAS)		

SuperSix EVO Carbon Disc Ultegra

BRP \$4999



Frame	All-New, BallisTec Carbon, integrated cable routing w/ Switchplate, 142×12 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	All-New, BallisTec Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)
Rims	HollowGram Si, Carbon Clincher Disc, 19mm inner, 35mm deep, tubeless ready
Hubs	(F) HollowGram Sealed Bearing, straight pull, 12×100 / (R) HollowGram Sealed Bearing, straight pull, 12×142
Spokes	Formula Grand Forza
Tires	Vittoria Rubino Pro Bright Black, 700 × 25c
Pedals	Not Included
Crank	Cannondale 1, BB30a, FSA rings, 52/36
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG601, 11-speed

Rear Cogs	Shimano 105, 11-32, 11-speed			
Front Derailleur	Shimano Ultegra, braze-on			
Rear Derailleur	Shimano Ultegra GS			
Shifters	Shimano Ultegra hydro disc, 2×11			
Handlebar	Cannondale 2, 7050 Alloy, Compact			
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm			
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°			
Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap			
Brakes	Shimano Ultegra hydro disc, 160/160mm RT54 rotors			
Brake Levers	Shimano Ultegra hydro disc			
Saddle	Prologo Nago RS STN			
Seatpost	All-New HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm			
Connectivity	Wheel Sensor			
Sizes	44, 48, 51, 54, 56, 58, 60, 62			
Color 1	BBQ (BBQ)			

C11550M

SuperSix EVO Carbon Ultegra 2

RRP \$3999		CATOM	
Frame	All-New, BallisTec Carbon, direct mount rim brake,		Shimano Ultegra, braze-on
	integrated cable routing w/ Switchplate, 130×9mm	Rear Derailleur	Shimano Ultegra GS
F . 1	QR, SAVE, PF30a, integrated seat binder	Shifters	Shimano Ultegra, 2×11
Fork	All-New, BallisTec Carbon, direct mount rim brake, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 100×9mm	Handlebar	Cannondale 3, 6061 alloy, Compact
	QR, 55mm offset (47-54cm) 45mm offset (56-62cm)	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Rims	Fulcrum Racing 500	Stem	Cannondale 3, 6061 alloy, 7-degree
Hubs	(F) Fulcrum Racing 500 / (R) Fulcrum Racing 500	Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap
Spokes	Fulcrum, Stainless steel	Brakes	Shimano Ultegra
Tires	Vittoria Zaffiro Pro Slick, 700 × 25c	Brake Levers	Shimano Ultegra
Pedals	Not Included	Saddle	Prologo Nago RS STN
		Seatpost	All-New HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm
Crank	Cannondale 1, BB30a, FSA rings, 52/36	Sizes	44, 48, 51, 54, 56, 58, 60, 62
	Cannondale Alloy PressFit30	Color 1	Acid Red (ARD)
Chain	Shimano HG601, 11-speed		
Rear Cogs	Shimano 105, 11-30, 11-speed		

SuperSix EVO Carbon Disc 105

RRP \$3899		carnord	
Frame	All-New, BallisTec Carbon, integrated cable routing w/	Rear Cogs	Shimano 105, 11-30, 11-speed
	Switchplate, 142×12 Speed Release thru-axle, SAVE,	Front Derailleur	Shimano 105, braze-on
	PF30a, flat mount disc, integrated seat binder	Rear Derailleur	Shimano 105 GS
Fork	All-New, BallisTec Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated	Shifters	Shimano 105 hydro disc, 2×11
	crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)	Handlebar	Cannondale 3, 6061 alloy, Compact
Rims	Fulcrum Racing 900 DB	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Hubs		Stem	Cannondale 3, 6061 alloy, 7-degree
HUDS	(F) Fulcrum Racing 900 DB, 12×100 / (R) Fulcrum Racing 900 DB, 12×142	Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap
Spokes	Fulcrum, Stainless steel	Brakes	Shimano 105 hydro disc, 160/160mm RT54 rotors
Tires	Vittoria Zaffiro Pro Slick, 700 × 25c	Brake Levers	Shimano 105 hydro disc
11100	Vittoria Zarino Fro olick, 100 % 200	0	Deslage Nees DC CTN

Pedals Not Included Cannondale 1, BB30a, FSA rings, 52/36 Crank Bottom Bracket Cannondale Alloy PressFit30

Chain Shimano HG601, 11-speed

Saddle Prologo Nago RS STN All-New HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm Seatpost Sizes 44, 48, 51, 54, 56, 58, 60 Color 1 Black Pearl (BPL)

cannondale

SuperSix EVO Carbon 105


RRP \$3399

Frame	All-New, BallisTec Carbon, direct mount rim brake,	Front Derailleur	Shimano 105, braze-on
	integrated cable routing w/ Switchplate, 130×9mm	Rear Derailleur	Shimano 105 GS
	QR, SAVE, PF30a, integrated seat binder	Shifters	Shimano 105, 2×11
Fork	All-New, BallisTec Carbon, direct mount rim brake, SAVE,	Handlebar	Cannondale 3, 6061 alloy, Compact
	1-1/8" to 1-1/4" steerer, integrated crown race, 100×9mm	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
	QR, 55mm offset (47-54cm) 45mm offset (56-62cm)	Stem	Cannondale 3, 6061 alloy, 7-degree
Rims	Fulcrum Racing 900	Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap
Hubs	(F) Fulcrum Racing 900 / (R) Fulcrum Racing 900	Brakes	Shimano 105
Spokes	Fulcrum, Stainless steel	Brake Levers	Shimano 105
Tires	Vittoria Zaffiro Pro Slick, 700 × 25c	Saddle	Prologo Nago RS STN
Pedals	Not Included	Seatpost	All-New HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm
Crank	Cannondale 1, BB30a, FSA rings, 52/36	Sizes	44, 48, 51, 54, 56, 58, 60
Bottom Bracket	Cannondale Alloy PressFit30	Color 1	BBQ (BBQ)
Chain	Shimano HG601, 11-speed	Color 2	Emerald (EMR)
Bear Cogs	Shimano 105, 11-20, 11-speed	CONTE	Enforming (Enforce)

Rear Cogs Shimano 105, 11-30, 11-speed

SuperSix EVO Hi-MOD Disc Frame

RRP \$4799

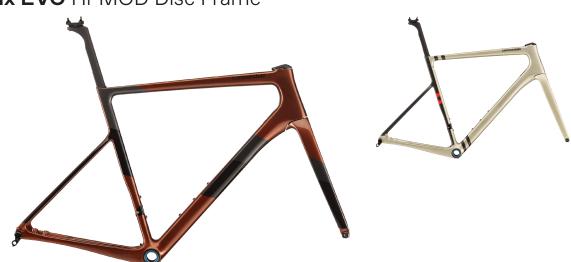

routing w/ Switchplate, 142×12 Speed	All-New, BallisTec Hi-MOD Carbon, integrated cable	Headset	SuperSix, 1-1/4" lower bearing, 25mm top cap
	routing w/ Switchplate, 142×12 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder	Seatpost	All-New HollowGram 27 SL KNØT, carbon, 2 bolt clamp, 330mm
		Sizes	44, 48, 51, 54, 56, 58, 60, 62
Fork	All-New, BallisTec Hi-MOD Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)	Color 1	Sienna (SNA)
		Color 2	Champagne (CHP)

ROAD | RACE

C11280U

Men-Ille CAAD13



Category Road | Race

Sizes

48, 50, 52, 54, 56, 58, 60, 63cm Wheel / Tire Size

Make Your Own Luck

This is the speediest, smoothest, best handling, finest performing aluminum race bike on the planet.

Key Benefits

Your Lucky Number

CAAD13 is the ultimate alloy race machine. With exceptional efficiency and superb handling, it out-performs most carbon — at an aluminum price. Fitting, since aluminum's atomic number is 13.

Decreased Drag

With every new CAAD we design, speed increases. The same can't be said for weight. Drag-reducing tube shapes and sleek integration keeps the CAAD13 light but make it much, much faster.

Smooth by Design

Dropped rear stay configuration and ample room for bigger tires delivers the best possible blend of stiff efficiency and unbeatable comfort in an alloy road racer.



CAAD13 Disc Force eTap AXS

rrp **\$7499**

				C13100M
Frame	All-New, SmartForm C1 Premium Alloy, integrated cable	Rear Cogs	SRAM XG-1270, 10-33, 12-speed	
	routing w/ Switchplate, SAVE, BB30a, 142×12 Speed	Front Derailleur	SRAM Force eTap AXS, braze-on	
	Release thru-axle, Di2 Ready, flat-mount disc	Rear Derailleur	SRAM Force eTap AXS	
Fork	All-New, BallisTec Carbon, SAVE, 1-1/8" to 1-1/4"	Shifters	SRAM Force eTap AXS HRD, 2×12	
	steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing,	Handlebar	HollowGram SAVE Carbon, 400mm (S), 420mm (M-L)	
	55mm offset (47-54cm) 45mm offset (56-62cm)	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm	
Rims	HollowGram 45 KNØT, Carbon, 20h front, 24h	Stem	All-New HollowGram SAVE, alloy, -6°	
	rear, 45mm deep, 21mm ID, tubeless ready	Headset	CAAD13, 1-1/4" lower bearing, 25mm Alloy top cap	
Hubs	(F) HollowGram KNØT, sealed bearing 12×100 centerlock / (R)	Brakes	SRAM Force eTap AXS, 160/160mm Centerlock rotors	
	HollowGram KNØT, 12×142 centerlock w/ DT Swiss internals	Brake Levers	SRAM Force eTap AXS	
Spokes	Formula Grand Forza	Saddle	Prologo Nago RS STN	
Tires	Vittoria Rubino Pro Bright Black, 700 × 28c	Seatpost	All-New HollowGram 27 SL KNØT, carbon, 2 bolt clamp, 33	30mm
Pedals	Not Included	Connectivity	Wheel Sensor	
Crank	SRAM Force eTap AXS	Sizes	48, 51, 54, 56, 58, 60, 62	
Bottom Bracket	SRAM BB30	Color 1	Champagne (CHP)	

C13100M

Chain SRAM Force eTap AXS

CAAD13 Ultegra

RRP \$3699			
Frame	All-New, SmartForm C1 Premium Alloy, direct mount	Front Derailleur	Shimano Ultegra, braze-on
	rim brake, integrated cable routing w/ Switchplate,	Rear Derailleur	Shimano Ultegra GS
	SAVE, BB30a, 130×9mm QR, Di2 Ready	Shifters	Shimano Ultegra, 2×11
Fork	All-New, BallisTec Carbon, direct mount rim brake, SAVE,	Handlebar	Cannondale 3, 6061 alloy, Compact
	1-1/8" to 1-1/4" steerer, integrated crown race, 100×9mm	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
	QR, 55mm offset (47-54cm) 45mm offset (56-62cm)	Stem	Cannondale 3, 6061 alloy, 31.8, 7°
Rims	Fulcrum Racing 600, alloy, 26mm deep	Headset	CAAD13, 1-1/4" lower bearing, 25mm Alloy top cap
Hubs	(F) Fulcrum Racing 600 / (R) Fulcrum Racing 600	Brakes	Shimano Ultegra
Spokes	Fulcrum, Stainless steel	Brake Levers	Shimano Ultegra
Tires	Vittoria Rubino Pro Bright Black, 700 × 28c	Saddle	Prologo Nago RS STN
Pedals	Not Included	Seatpost	All-New HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm
Crank	Cannondale 1, BB30a, FSA rings, 52/36	Sizes	44, 48, 51, 54, 56, 58, 60, 62
Bottom Bracket	Cannondale BB30	Color 1	BBQ (BBQ)
Chain	Shimano HG601, 11-speed	001011	555 (255)

Chain Rear Cogs Shimano HG601, 11-speed

Shimano 105, 11-30, 11-speed

CAAD13 Disc 105

rrp \$3199

Frame	All-New, SmartForm C1 Premium Alloy, integrated cable routing w/ Switchplate, SAVE, BB30a, 142×12 Speed Release thru-axle, Di2 Ready, flat-mount disc
Fork	All-New, BallisTec Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)
Rims	RD 2.0, 28h
Hubs	(F) Formula CL-712, 12×100mm centerlock (R) Formula RXC-400, 12×142 centerlock
Spokes	Stainless steel, 14g
Tires	Vittoria Rubino Pro Bright Black, 700 × 28c
Pedals	Not Included
Crank	Cannondale 1, BB30a, FSA rings, 52/36
Bottom Bracket	Cannondale BB30
Chain	Shimano HG601, 11-speed

C13300M Shimano 105, 11-30, 11-speed Rear Cogs Front Derailleur Shimano 105, braze-on Rear Derailleur Shimano 105 GS Shifters Shimano 105 hydro disc, 2×11 Handlebar Cannondale 3, 6061 alloy, Compact Grips Cannondale Grip Bar Tape w/Gel, 3.5mm Stem Cannondale 3, 6061 alloy, 31.8, 7° Headset CAAD13, 1-1/4" lower bearing, 25mm Alloy top cap Brakes Shimano 105 hydro disc, 160/160mm RT54 rotors Shimano 105 hydro disc Brake Levers Saddle Prologo Nago RS STN All-New HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm Seatpost 44, 48, 51, 54, 56, 58, 60, 62 Sizes Color 1 Acid Red (ARD)

CAAD13 Frame





CAAD13 Disc Frame





	C13180M		C13280N
Frame	All-New, SmartForm C1 Premium Alloy, integrated cable routing w/ Switchplate, SAVE, BB30a, 142×12 Speed Release thru-axle, Di2 Ready, flat-mount disc	Frame	All-New, SmartForm C1 Premium Alloy, integrated cable routing w/ Switchplate, SAVE, BB30a, 142×12 Speed Release thru-axle, Di2 Ready, flat-mount disc
Fork	All-New, BallisTec Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)	Fork	All-New, BallisTec Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)
Headset	CAAD13, 1-1/4" lower bearing, 25mm Alloy top cap	Headset	CAAD13, 1-1/4" lower bearing, 25mm Alloy top cap
Seatpost	All-New HollowGram 27 SL KNØT, carbon, 2 bolt clamp, 330mm	Seatpost	All-New HollowGram 27 SL KNØT, carbon, 2 bolt clamp, 330mm
Sizes	48, 51, 54, 56, 58, 60	Sizes	44, 48, 51, 54, 56, 58, 60
Color 1	BBQ (BBQ)	Color 1	Goldfinger (GDF)

C13280M

CAAD Optimo



Category Road | Race

Sizes

44, 48, 51, 54, 56, 58, 60, 63cm **Wheel / Tire Size** 700 x25-28c

Where Performance Begins

A performance road bike with race-winning DNA. Smooth, fast, affordable—pick three.

Key Benefits

Exceptional Aluminum Performance

Refined butting, precisely controlled tube shapes, and renowned double-pass welds create frames that are lighter and ride better than our competitors' highest-end alloy offerings.

Elite Race Geometry

With similar geometry to the CAAD13, the CAAD Optimo offers riders true race handling and body position.

Bide Smoother with SAVE

Specifically engineered flex zones in the rear of the frame absorb road irregularities for better comfort and control.





CAAD Optimo 105

rrp **\$1999**

			C14100M
Frame	SmartForm C2 Alloy, SAVE, tapered headtube, fender mounts	Rear Derailleur	Shimano 105 GS
Fork	Full Carbon, 1-1/8" to 1-1/4" steerer, fender mounts	Shifters	Shimano 105, 2×11
Rims	RS 2.0, 24h front, 28h rear	Handlebar	Cannondale 3, 6061 alloy, Compact
Hubs	(F) Formula RB-56 / (R) Formula RB-5711	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Spokes	Stainless steel, 14g	Stem	Cannondale 3, 6061 alloy, 31.8, 7°
Tires	Vittoria Zaffiro Pro Slick, 700 × 25c	Headset	CAAD Optimo, 1-1/8" to 1-1/4", 25mm top cap
Pedals	Wellgo w/ Clip and Strap	Brakes	Tektro R741
Crank	FSA Gossamer alloy, 50/34	Brake Levers	Shimano 105
Bottom Bracket	FSA MegaExo	Saddle	Cannondale Stage Ergo
Chain	KMC X11, 11-speed	Seatpost	Cannondale 3, 6061 alloy, 27.2 × 350mm (44-56), 400mm (58-63)
Rear Cogs	Shimano 105, 11-30, 11-speed	Sizes	48, 51, 54, 56, 58, 60, 63
Front Derailleur	Shimano 105, 31.8 clamp	Color 1	Black Pearl (BPL)



rrp **\$1599**



Frame	SmartForm C2 Alloy, SAVE, tapered headtube, fender mounts
Fork	Full Carbon, 1-1/8" to 1-1/4" steerer, fender mounts
Rims	RS 2.0, 24h front, 28h rear
Hubs	(F) Formula RB-31 / (R) Formula RB-32
Spokes	Stainless steel, 14g
Tires	Vittoria Zaffiro, 700 × 25c
Pedals	Wellgo w/ Clip and Strap
Crank	FSA Vero alloy, 50/34
Bottom Bracket	FSA Cartridge
Chain	KMC X9, 9-speed
Rear Cogs	Shimano HG50, 11-30, 9-speed
Front Derailleur	Shimano Sora, 31.8 clamp

	C143000
Rear Derailleur	Shimano Sora GS
Shifters	Shimano Sora, 2×9
Handlebar	6061 alloy, Compact
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Stem	Cannondale 4, 6061 alloy, 31.8, 7°
Headset	CAAD Optimo, 1-1/8" to 1-1/4", 25mm top cap
Brakes	Promax RC-452
Brake Levers	Shimano Sora
Saddle	Cannondale Stage Ergo
Seatpost	6061 Alloy, 27.2 × 350mm (44-56), 400mm (58-63)
Sizes	44, 48, 51, 54, 56, 58, 60, 63
Color 1	Midnight (MDN)

Synapse Carbon



Category Road | Endurance

Sizes

Women's: 44, 48, 51, 54cm

Men's: 48, 51, 54, 56, 58, 61cm **Wheel / Tire Size** 700 x28-32c

Keep Firing

A road bike that's light, stiff, fast and surprisingly comfortable. Your rides will go longer. You'll barely notice.

Key Benefits

Connected & Protected

SAVE micro-suspension technology in the frame, fork, bar and seatpost insulates you from bumps while keeping you connected to the road. Better handling and control, with the comfort to ride all day.

Race-Level Performance

Light enough for quick climbing and stiff enough for sprinting thanks to asymmetric design, refined tube shapes and dialed carbon layup. This bike's lively feel is replicated across every size.

True Endurance

Endurance Race Geometry positions you forward enough to go hard but upright enough to go long, plus a removable seatstay bridge and hidden fender mounts keep you grinding on any road, in any weather.





Synapse Carbon Hi-MOD Red eTap AXS

RRP \$13499

Frame	BallisTec Hi-MOD Carbon, Di2 ready, SAVE, BB30a, flat mount, 12mm thru axle, internal cable routing, removable fender bridge
Fork	BallisTec Hi-MOD Carbon, SAVE, integrated crown race, 12×100mm thru-axle, internal routing, size-specific design - 44-48. 11/8" steerer, 60mm rake 51-54: 1-1/8" - 1-1/4" tapered steerer, 55mm rake 56-61: 1-1/8" - 1-3/8" tapered steerer, 45mm rake
Rims	HollowGram 45 SL KNØT, Carbon, 20h front, 24h rear, 45mm deep, 21mm ID, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100 centerlock / (R) HollowGram KNØT, 12×142 centerlock w/ DT Swiss internals, SRAM XDR driver
Spokes	DT Swiss Aerolite
Tires	Vittoria Corsa, 700 × 28c
Pedals	Not Included
Crank	SRAM RED Carbon, 46/33
Bottom Bracket	SRAM RED DUB PF30
Chain	SRAM RED, 12-speed

		C12100M
Rear Cogs	SRAM XG-1290, 10-33, 12-speed	
Front Derailleur	SRAM RED eTap AXS, braze-on	
Rear Derailleur	SRAM RED eTap AXS	
Shifters	SRAM RED eTap AXS HRD, 2×12	
Handlebar	HollowGram SystemBar SAVE, Carbon, 8 deg. pitch adjust	
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm	
Stem	All-New HollowGram SAVE, alloy, -6°	
Headset	Synapse Si, 25mm Carbon top cap	
Brakes	SRAM RED eTap AXS HRD, 160/160mm Centerlock rotors	
Brake Levers	SRAM RED eTap AXS HRD	
Saddle	Fabric Scoop Shallow Pro, carbon rails	
Seatpost	SAVE Carbon, 25.4 × 350mm	
Connectivity	Wheel Sensor	
Sizes	51, 54, 56, 58, 61	
Color 1	Mantis (MAT)	

Synapse Carbon Hi-MOD Disc Ultegra Di2



Frame BallisTec Hi-MOD Carbon, Di2 ready, So 12mm thru axle, internal cable routing, 12mm thru axle, internal cable routing, Fork BallisTec Hi-MOD Carbon, SAVE, integi 12×100mm thru-axle, internal routing, s 11/8" steerer, 60mm rake 51-54: 1-1/8" 55mm rake 56-61: 1-1/8" - 1-3/8" taperd Rims HollowGram 45 SL KNØT, Carbon, 20h rear, 45mm deep, 21mm ID, tubeless re Hubs (F) HollowGram KNØT, sealed bearing HollowGram KNØT, 12×142 centerlock Spokes DT Swiss Aerolite Tires Vittoria Corsa, 700 × 28c Pedals Not Included	removable fender bridge ated crown race, ize-specific design - 44-48: - 1-1/4" tapered steerer,
12×100mm thru-axle, internal routing, s 11/8" steerer, 60mm rake 51-54: 1-1/8" 55mm rake 56-61: 1-1/8" - 1-3/8" taperd Rims HollowGram 45 SL KNØT, Carbon, 20h rear, 45mm deep, 21mm ID, tubeless re Hubs (F) HollowGram KNØT, sealed bearing HollowGram KNØT, 12×142 centerlock Spokes DT Swiss Aerolite Tires Vittoria Corsa, 700 × 28c	ize-specific design - 44-48: - 1-1/4" tapered steerer,
rear, 45mm deep, 21mm ID, tubeless re Hubs (F) HollowGram KNØT, sealed bearing HollowGram KNØT, 12×142 centerlock Spokes DT Swiss Aerolite Tires Vittoria Corsa, 700 × 28c	
HollowGram KNØT, 12×142 centerlock Spokes DT Swiss Aerolite Tires Vittoria Corsa, 700 × 28c	
Tires Vittoria Corsa, 700 × 28c	
Pedals Not Included	
Crank HollowGram, BB30a w/ OPI SpideRing	
Bottom Bracket Cannondale BB30	50/34
Chain Shimano HG701, 11-speed	50/34

Rear Cogs	Shimano Ultegra, 11-34, 11-speed
Front Derailleur	Shimano Ultegra Di2, braze-on
Rear Derailleur	Shimano Ultegra Di2 RX
Shifters	Shimano Ultegra Di2 hydro disc, 2×11
Handlebar	HollowGram SystemBar SAVE, Carbon, 8 deg. pitch adjust
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Stem	All-New HollowGram SAVE, alloy, -6°
Headset	Synapse Si, 25mm Carbon top cap
Brakes	Shimano Ultegra Di2 hydro disc, 160/140mm RT800 rotors
Brake Levers	Shimano Ultegra Di2 hydro disc
Saddle	Fabric Scoop Shallow Race, titanium rails
Seatpost	Cannondale 2, UD Carbon, 25.4 × 350mm
Connectivity	Wheel Sensor
Sizes	48, 51, 54, 56, 58, 61
Color 1	Champagne (CHP)

Synapse Carbon Disc Ultegra Di2

rrp \$5999

				C12250M
Frame	BallisTec Carbon, Di2 ready, SAVE, BB30a, flat mount, 12mm	Rear Cogs	Shimano 105, 11-34, 11-speed	
	thru axle, internal cable routing, removable fender bridge	Front Derailleur	Shimano Ultegra Di2, braze-on	
Fork	BallisTec Carbon, SAVE, integrated crown race, 12×100mm	Rear Derailleur	Shimano Ultegra Di2 GS	
	thru-axle, internal routing, size-specific design - 44-48: 11/8" steerer, 60mm rake 51-54: 1-1/8" - 1-1/4" tapered steerer,	Shifters	Shimano Ultegra Di2 hydro disc, 2×11	
		Handlebar	Cannondale 2, 7050 Alloy, Compact	
	55mm rake 56-61: 1-1/8" - 1-3/8" tapered steerer, 45mm rake	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm	
Rims	Fulcrum Racing 600 DB, Alloy clincher, 26mm deep	Stem	Cannondale 2, 6061 Alloy, 31.8, 7°	
Hubs	(F) Fulcrum Racing 600 DB, 12×100 / (R) Fulcrum Racing 600 DB, 12×142	Headset	Synapse, 1-1/4" lower bearing, 25mm top cap	
Spokes	Fulcrum, Stainless steel	Brakes	Shimano Ultegra Di2 hydro disc, 160/160mm RT30 rotors	
Tires	Vittoria Rubino Pro Bright Black, 700×30c	Brake Levers	Shimano Ultegra Di2 hydro disc	
	5	Saddle	Fabric Scoop Shallow Sport, steel rails	
Pedals	Not Included	Seatpost	Cannondale 2, UD Carbon, 25.4 × 350mm	
Crank	Cannondale 1, BB30a, FSA rings, 50/34	· ·		
Bottom Bracket	Cannondale Alloy PressFit30	Connectivity	Wheel Sensor	
Chain	Shimano HG601, 11-speed	Sizes	48, 51, 54, 56, 58, 61	
Ullani		Color 1	Emerald (EMR)	

Synapse Carbon Disc 105



	steerer, 60mm rake 51-54: 1-1/8" - 1-1/4" tapered steerer, 55mm rake 56-61: 1-1/8" - 1-3/8" tapered steerer, 45mm rake
Rims	RD 2.0, 28h
Hubs	(F) Formula CL-712, 12×100mm centerlock (R) Formula RXC-400, 12×142 centerlock
Spokes	Stainless steel, 14g
Tires	Vittoria Zaffiro Pro Bright Black, 700 × 30c
Pedals	Not Included
Crank	Cannondale 1, BB30a, FSA rings, 50/34
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG601, 11-speed

ficul oogs	children loo, in opeca
Front Derailleur	Shimano 105, braze-on
Rear Derailleur	Shimano 105 GS
Shifters	Shimano 105 hydro disc, 2×11
Handlebar	Cannondale 3, 6061 alloy, Compact
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Stem	Cannondale 3, 6061 alloy, 7-degree
Headset	Synapse, 1-1/4" lower bearing, 25mm top cap
Brakes	Shimano 105 hydro disc, 160/160mm RT30 rotors
Brake Levers	Shimano 105 hydro disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale 3, 6061 Alloy, 25.4 × 350mm (46-56), 400mm (58-61)
Sizes	48, 51, 54, 56, 58, 61
Color 1	Black (BLK)
Color 2	Nuclear Yellow (NYW)

Synap RRP \$4499	se Carbon Disc Women's U	Itegra	<image/>
Frame	BallisTec Carbon, Di2 ready, SAVE, BB30a, flat mount, 12mm thru axle, internal cable routing, removable fender bridge	Rear Cogs	Shimano 105, 11-34, 11-speed
Fork	BallisTec Carbon, SAVE, integrated crown race,	Front Derailleur Rear Derailleur	Shimano Ultegra, braze-on Shimano Ultegra GS
FUIK	12×100mm thru-axle, internal routing, size-specific	Shifters	
	design 44-48: 11/8" steerer/60mm rake, 51-54:		Shimano Ultegra hydro disc, 2×11
	1-1/8" - 1-1/4" tapered steerer/55mm rake	Handlebar	Cannondale 3, 6061 Alloy, Compact
Rims	Fulcrum Racing 600 DB, Alloy clincher, 26mm deep	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Hubs	(F) Fulcrum Racing 600 DB, 12×100 / (R)	Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
	Fulcrum Racing 600 DB, 12×142	Headset	Synapse, 1-1/4" lower bearing, 25mm top cap
Spokes	Fulcrum, Stainless steel	Brakes	Shimano Ultegra hydro disc, 160/160mm RT30 rotors
Tires	Vittoria Rubino Pro Bright Black, 700 × 30c	Brake Levers	Shimano Ultegra hydro disc
Pedals	Not Included	Saddle	Fabric Scoop Women's Sport, 155mm width, steel rails
Crank	Cannondale 1, BB30a, FSA rings, 50/34	Seatpost	Cannondale 3, 6061 Alloy, 25.4 × 350mm (46-56), 400mm (58-61)
Bottom Bracket	Cannondale Alloy PressFit30	Sizes	44, 48, 51, 54
Chain	Shimano HG601, 11-speed	Color 1	Black (BLK)

Synapse



Category Road | Endurance

Sizes

Women's: 44, 48, 51, 54cm

Men's: 48, 51, 54, 56, 58, 61cm **Wheel / Tire Size** 700 x28-30c

Keep Firing

A road bike that's light, stiff, fast and surprisingly comfortable. Your rides will go longer. You'll barely notice.

Key Benefits

Start Out Right

On anything from fast group rides to daily commutes, the Synapse's light weight, comfortable sportive position and smooth ride will help you ride faster, ride longer and ride more.

Connected & Protected

SAVE micro-suspension technology in the frame and fork insulates you from bumps while maintaining your connection to the road. Improved handling, more control, and enough comfort to ride all day.

True Endurance

Endurance Geometry positions you forward enough to go hard but with enough upright comfort to go long.



Synapse Disc 105

rrp \$2199

Frame	SmartForm C2 Alloy, SAVE, BB30, internal
	cable routing, flat mount
Fork	Full Carbon, SAVE, internal routing, 1-1/8" - 11/4" tapered
	steerer, flat mount, 55mm rake, 12×100 thru axle
Rims	RD 2.0, 28h
Hubs	(F) Formula CRX-512, 100×12mm, (R) Formula CX-22, QR
Spokes	Stainless steel, 14g
Tires	Vittoria Zaffiro, 700 × 30c
Pedals	Not Included
Crank	FSA Gossamer alloy, BB30, 50/34
Bottom Bracket	Cannondale BB30
Chain	KMC X11, 11-speed
Rear Cogs	Shimano 105, 11-34, 11-speed
Front Derailleur	Shimano 105, braze-on

	C12	2550M
Rear Derailleur	Shimano 105 GS	
Shifters	Shimano 105, 2×11	
Handlebar	Cannondale 3, 6061 alloy, Compact	
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm	
Stem	Cannondale 3, 6061 alloy, 31.8, 7°	
Headset	FSA Sealed Bearing, Integrated, 1-1/4"-1-1/8"	
Brakes	TRP Spyre-C cable actuated disc, 160/160mm rotors	
Brake Levers	Shimano 105	
Saddle	Cannondale Stage Ergo	
Seatpost	Cannondale 3, 6061 alloy, 25.4 × 350mm (44-56), 400mm (58-	-63)
Sizes	51, 54, 56, 58, 61	
Color 1	BBQ (BBQ)	

Synapse Disc Sora



Color 1

Sage Gray (SGG)

Rear Cogs Shimano HG400, 11-34, 9-speed

Synapse Disc Women's 105

RRP \$2199

Pedals

Crank

Chain

Rear Cogs

Not Included

Bottom Bracket FSA Cartridge


FSA Vero alloy, 50/34

Shimano HG400, 11-34, 9-speed

KMC Z9, 9-speed

Frame	SmartForm C2 Alloy, SAVE, BB30, internal cable routing, flat mount
Fork	Full Carbon, SAVE, internal routing, 1-1/8" - 11/4" tapered steerer, flat mount, 55mm rake, 12×100 thru axle
Rims	RD 2.0, 28h
Hubs	(F) Formula CRX-512, 100×12mm, (R) Formula CX-22, QR
Spokes	Stainless steel, 14g
Tires	Vittoria Zaffiro, 700 × 30c
Pedals	Not Included
Crank	FSA Gossamer alloy, BB30, 50/34
Bottom Bracket	Cannondale BB30
Chain	KMC X11, 11-speed
Rear Cogs	Shimano 105, 11-34, 11-speed

	C12550F
Front Derailleur	Shimano 105, braze-on
Rear Derailleur	Shimano 105 GS
Shifters	Shimano 105, 2×11
Handlebar	Cannondale 3, 6061 alloy, Compact
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
Stem	Cannondale 3, 6061 alloy, 31.8, 7°
Headset	FSA Sealed Bearing, Integrated, 1-1/4"-1-1/8"
Brakes	TRP Spyre-C cable actuated disc, 160/160mm rotors
Brake Levers	Shimano 105
Saddle	Cannondale Stage Ergo Women's
Seatpost	Cannondale 3, 6061 alloy, 25.4 × 350mm (46-56), 400mm (58-61)
Sizes	44, 48, 51, 54
Color 1	Black (BLK)





Saddle

Sizes

Color 1

Seatpost

Cannondale Stage Ergo Women's

44, 48, 51, 54

Cashmere (CAS)

Alloy Micro Adjust, 15mm setback, 27.2 × 350mm

Topstone Carbon



Category Road | Gravel

Sizes XS, S, M, L, XL Wheel / Tire Size

More Give. More Go.

An unprecedented gravel bike with real suspension. The most capable offroad, the most comfortable on-road.

Key Benefits

KingPin Suspension System

Revolutionary, super-light suspension that lets you ride harder on dirt and more smoothly on pavement. Better control. Better traction. Better comfort. Nothing sacrificed.

It's Easier to Go Harder

Refined geometry and rider position deliver an experience that's stable, composed and comfortable without losing that spark. Go further, ride longer, charge harder.

The Last Detail

We thought of everything. Big clearance for big tires. Tons of gear and storage mounts. Speed Release thru-axles. DirectLine cable routing. Internal dropper post compatibility. In short, the works.





Topstone Carbon Force eTap AXS

RRP \$7499

Frame	All-New, BallisTec Carbon, Kingpin suspension system, Proportional Response size-specific construction, Directline internal cable routing, BB30-83 Ai, 142×12 Speed Release thru-axle, flat-mount disc, removable fender bridge, multiple gear/bottle mounts, dropper post compatible
Fork	All-New, BallisTec Carbon, 55mm OutFront offset, SAVE, 1-1/8" to 1.5" steerer, integrated crown race, Directline internal routing, 12×100mm Speed Release thru-axle, flat mount disc, gear/rack/fender mounts
Rims	HollowGram 22 Carbon, 22mm deep, 25mm ID, tubeless ready
Hubs	(F) HollowGram Sealed Bearing, straight pull, 12×100 / (R) HollowGram 142×12 rear w/DT internals, Centerlock
Spokes	HollowGram, double-butted straight pull (Ai Offset Dish - rear)
Tires	WTB Riddler TCS Light, 700 × 37c, tubeless ready
Crank	SRAM Force eTap AXS, 46/33
Bottom Bracket	Cannondale Alloy BB30
Chain	SRAM Force eTap AXS, 12-speed

		15200M
Rear Cogs	SRAM XG-1270, 10-33, 12-speed	
Front Derailleur	SRAM Force eTap AXS, braze-on	
Rear Derailleur	SRAM Force eTap AXS	
Shifters	SRAM Force eTap AXS HRD, 2×12	
Handlebar	HollowGram SAVE Carbon, 400mm (S), 420mm (M-L)	
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm	
Stem	All-New HollowGram SAVE, alloy, -6°	
Headset	Integrated, 1.5" lower to 1-1/8" upper w/	
	reducer, 25mm Alloy top cap	
Brakes	SRAM Force eTap AXS, 160/160mm Centerline, Centerlock ro	otors
Brake Levers	SRAM Force eTap AXS	
Saddle	Fabric Scoop Shallow Race, titanium rails	
Seatpost	SAVE Carbon, 27.2 × 350mm (XS-L), 400mm (XL)	
Connectivity	Wheel Sensor	
Sizes	XS, S, M, L, XL	
Color 1	Acid Red (ARD)	

Topstone Carbon Ultegra RX 2

RRP \$4199



			C15500M
Frame	All-New, BallisTec Carbon, Kingpin suspension system,	Rear Cogs	Shimano 105, 11-34, 11-speed
	Proportional Response size-specific construction, Directline	Front Derailleur	Shimano Ultegra, braze-on
	internal cable routing, BB30-83 Ai, 142×12 Speed Release	Rear Derailleur	Shimano Ultegra RX GS Shadow Plus
	thru-axle, flat-mount disc, removable fender bridge,	Shifters	Shimano Ultegra hydro disc, 2×11
E a ala	multiple gear/bottle mounts, dropper post compatible	Handlebar	Cannondale 3, butted 6061 alloy, 16 deg flare drop
Fork	All-New, BallisTec Carbon, 55mm OutFront offset, SAVE, 1-1/8" to 1.5" steerer, integrated crown race,	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm
	Directline internal routing, 12×100mm Speed Release	Stem	Cannondale 2, 6061 alloy, 31.8, 6°
	thru-axle, flat mount disc, gear/rack/fender mounts	Headset	Integrated, 1.5" lower to 1-1/8" upper w/
Rims	WTB KOM Light i23 TCS, 28h, tubeless ready		reducer, 25mm Alloy top cap
Hubs	(F) Formula CL-712, 12×100 centerlock / (R)	Brakes	Shimano Ultegra hydro disc, 160/160mm RT54 rotors
	Formula RXC-400, 12×142 centerlock	Brake Levers	Shimano Ultegra hydro disc
Spokes	Stainless Steel, 14g (Ai Offset Dish - rear)	Saddle	Fabric Scoop Radius Elite, cro-mo rails
Tires	WTB Riddler TCS Light, 700 × 37c, tubeless ready	Seatpost	Cannondale 2, carbon, 27.2 × 350mm
Crank	Cannondale 1, BB30a, FSA rings, 46/30	Connectivity	Wheel Sensor
Bottom Bracket	Cannondale Alloy PressFit30	Sizes	XS, S, M, L, XL
Chain	Shimano HG601, 11-speed	Color 1	Agave (AGV)

Topstone



Category Road | Gravel

Sizes XS, S, M, L, XL Wheel / Tire Size

Born to Roll and Roam

A capable, versatile gravel road bike. Built for chasing horizons, exploring routes less travelled or accelerating your commute.

Key Benefits

Confident Control

A balanced riding position: upright enough for comfort over the long haul and control on technical terrain, yet still low and forward enough for speedy efficiency.

Smooth and Able

Built with plenty of room for tires up to 42mm wide, for comfort, grip and adventurous capability.

Ready for Adventure

With mounts for three waterbottles, plus mounts for top tube storage, Topstone is ready to go long. Multiple bottle cage positions on the downtube mount let you configure for big frame bags.





Topstone 105

RRP \$2999

Frame	SmartForm C2 Alloy, 142×12 thru-axle, tapered
	headtube, flat mount disc, StraightShot internal
	cable routing, multiple gear/bottle mounts
Fork	Full Carbon, 1-1/8" to 1-1/4" steerer, 55mm OutFront offset,
	flat mount disc, internal routing, 12×100 thru axle
Rims	WTB ST i23 TCS, 28h, tubeless ready
Hubs	(F) Formula RX-512, 12×100 centerlock / (R)
	Formula RX-142, 12×142 centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Riddler TCS Light, 700 × 37c, tubeless ready
Pedals	Not Included
Crank	FSA Omega ME alloy, 46/30
Bottom Bracket	FSA Omega
Chain	KMC X11, 11-speed
Rear Cogs	Shimano 105, 11-34, 11-speed

		C15700M
Front Derailleur	Shimano 105, 31.8 clamp	
Rear Derailleur	Shimano 105 GS	
Shifters	Shimano 105 hydro disc, 2×11	
Handlebar	Cannondale 3, butted 6061 alloy, 16 deg flare drop	
Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm	
Stem	Cannondale 3, 6061 alloy, 31.8, 7°	
Headset	Topstone Si, 25mm Alloy top cap	
Brakes	Shimano 105 hydro disc, 160/160mm RT56 rotors	
Brake Levers	Shimano 105 hydro disc	
Saddle	Fabric Scoop Radius Sport, steel rails	
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm	
Sizes	XS, S, M, L, XL	
Color 1	Graphite (GRA)	

Cannondale 4, 6061 Alloy, 27.2 × 400mm

XS, S, M, L, XL

Mantis (MAT)

Topstone Sora

FSA Tempo Adventure, 46/30

KMC Z9, 9-speed

Sunrace, 11-34, 9-speed

RRP \$1999

Crank

Chain

Rear Cogs

Bottom Bracket FSA Cartridge




Seatpost

Sizes

Color 1


SystemSix

	47	51	54	56	58	60	62
A Seat Tube Length (cm)	38.5	43.3	48.2	53.0	55.3	57.7	60.0
B Top Tube Horizontal (cm)	51.4	52.9	54.4	56	57.6	59.2	60.9
C Head Tube Angle	71.2°	71.2°	73.0°	73.0°	73.0°	72.9°	72.9°
D Seat Tube Angle	75.1°	74.7°	74.3°	73.9°	73.5°	73.1°	72.7°
E Standover (cm)	68.0	72.3	76.2	79.8	82.1	84.3	86.3
F Head Tube Length (cm)	8.8	11.4	12.8	14.9	17.2	19.3	21.4
G Wheelbase (cm)	97.4	98.9	97.5	98.7	100	101.2	102.4
H Front Center (cm)	58.2	59.5	58.1	59.3	60.5	61.7	62.9
I Chain Stay Length (cm)	40.5	40.5	40.5	40.5	40.5	40.5	40.5
J Bottom Bracket Drop (cm)	7.9	7.4	7.2	7.2	6.9	6.9	6.9
K Bottom Bracket Height (cm)	26.1	26.6	26.9	26.9	27.1	27.1	27.1
∟ Fork Rake (cm)	5.5	5.5	4.5	4.5	4.5	4.5	4.5
M Trail (cm)	5.8	5.8	5.7	5.7	5.7	5.8	5.8
N Stack (cm)	50	52	54	56	58	60	62
O Reach (cm)	37.5	38.1	38.6	39.2	39.8	40.3	40.9




SuperSix EVO

	44	48	51	54	56	58	60	62
A Seat Tube Length (cm)	40.0	43.8	47.7	51.5	53.6	55.8	57.9	60.0
B Top Tube Horizontal (cm)	51.2	52.0	52.8	54.6	56.2	57.8	59.4	61.1
C Head Tube Angle	70.9°	71.2°	71.2°	71.2°	73.0°	73.0°	73.0°	73.0°
D Seat Tube Angle	74.3°	74.3°	74.3°	73.7°	73.3°	72.9°	72.5°	72.1°
E Standover (cm)	69.8	72.6	75.6	78.8	80.8	83.1	85.0	87.0
F Head Tube Length (cm)	9.9	11.4	13.0	15.3	16.4	18.8	20.9	23.0
G Wheelbase (cm)	97.9	98.5	99.4	100.	99.2	100.5	101.6	102.8
H Front Center (cm)	58.2	58.8	59.7	61.1	59.5	60.7	61.8	63.0
Chain Stay Length (cm)	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8
J Bottom Bracket Drop (cm)	7.4	7.4	7.4	7.2	7.2	6.9	6.9	6.9
K Bottom Bracket Height (cm)	26.8	26.8	26.8	27.1	27.1	27.3	27.3	27.3
∟ Fork Rake (cm)	5.5	5.5	5.5	5.5	4.5	4.5	4.5	4.5
M Trail (cm)	6.0	5.8	5.8	5.8	5.8	5.8	5.8	5.8
N Stack (cm)	50.4	51.9	53.4	55.4	57.4	59.4	61.4	63.4
O Reach (cm)	37.0	37.4	37.8	38.4	39.0	39.5	40.0	40.6




CAAD13

	44	48	51	54	56	58	60	62
A Seat Tube Length (cm)	40.4	44.2	48.1	51.9	54	56.2	58.3	60.4
B Top Tube Horizontal (cm)	51	52	53	54.6	56.2	57.8	59.4	61.1
C Top Tube Actual (cm)	NA							
D Head Tube Angle	70.9°	71.2°	71.2°	71.2°	73°	73°	73°	73°
E Seat Tube Angle	74.5°	74.3°	74.1°	73.7°	73.3°	72.9°	72.5°	72.1°
F Standover (cm)	68.6	72.3	75.3	79	80.5	82.9	84.8	86.8
G Head Tube Length (cm)	9.4	11.4	13	15.4	16.4	18.8	20.9	23
H Wheelbase (cm)	97.6	98.5	99.4	100.8	99.2	100.5	101.6	102.8
Front Center (cm)	58.1	58.9	59.8	61.1	59.4	60.7	61.8	63
」 Chain Stay Length (cm)	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8
K Bottom Bracket Drop (cm)	7.9	7.4	7.4	7.2	7.2	6.9	6.9	6.9
∟ Bottom Bracket Height (cm)	26.3	26.8	26.8	27.1	27.1	27.3	27.3	27.3
M Fork Rake (cm)	5.5	5.5	5.5	5.5	4.5	4.5	4.5	4.5
N Trail (cm)	60.2	58.3	58.3	58.3	57.5	57.5	57.5	57.5
O Stack (cm)	50.5	52	53.5	55.5	57.5	59.5	61.5	63.5
P Reach (cm)	37	37.4	37.8	38.4	38.9	39.5	40	40.6




CAAD Optimo

	44	48	51	54	56	58	60	63
A Seat Tube Length (cm)	46.5	48.7	53	55.9	57.6	59.4	61.5	63.5
B Top Tube Horizontal (cm)	50	51	52.8	54.7	56.1	57.5	59.1	60.7
C Head Tube Angle	70.5°	71.5°	72.3°	72.9°	73.1°	73.2°	73.3°	73.4°
D Seat Tube Angle	76.0°	74.7°	74.3°	73.8°	73.5°	73.2°	72.9°	72.6°
E Standover (cm)	73.5	74.2	76	78.7	80.2	82.2	84.1	86.2
F Head Tube Length (cm)	10.7	*	12	13.9	15.5	17.5	19.5	21.9
G Wheelbase (cm)	97.4	96.3	97	98	98.9	100	101.3	102.7
H Front Center (cm)	58	56.9	57.6	58.6	59.5	60.5	61.6	62.8
I Chain Stay Length (cm)	40.5	40.5	40.5	40.5	40.5	40.5	40.7	40.9
J Bottom Bracket Drop (cm)	7.4	7.4	7.4	7.2	7.2	6.9	6.9	6.9
K Bottom Bracket Height (cm)	26.8	26.8	26.8	27.1	27.1	27.3	27.3	27.3
L Fork Rake (cm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
M Trail (cm)	7.3	6.7	6.2	5.8	5.7	5.6	5.6	5.5
N Stack (cm)	51.4	51.8	53.3	55.1	56.6	58.3	60.3	62.6
O Reach (cm)	37.2	36.9	37.8	38.7	39.3	39.9	40.5	41.1




Synapse Carbon

	44	48	51	54	56	58	61
A Seat Tube Length (cm)	37.0	40.7	44.3	48.0	52.0	55.0	59.0
B Top Tube Horizontal (cm)	50.5	51.7	53.1	54.7	56.1	57.9	60.4
C Head Tube Angle	70.2°	70.8°	71.7°	*	73.0°	73.0°	73.0°
D Seat Tube Angle	74.7°	74.6°	74.3°	73.9°	73.5°	73.0°	72.5°
E Standover (cm)	68	71.2	74.2	77.3	80.4	83.3	86.8
F Head Tube Length (cm)	10.3	12.2	13.7	16.1	17.3	19.7	22.9
G Wheelbase (cm)	98.9	99.6	99.4	100.8	99.5	100.9	102.8
H Front Center (cm)	59.1	59.8	59.6	60.9	59.6	60.9	62.7
Chain Stay Length (cm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
J Bottom Bracket Drop (cm)	7.5	7.5	7.5	7.3	7.3	7.0	7.0
K Bottom Bracket Height (cm)	27.0	27.0	27.0	27.2	27.2	27.5	27.5
∟ Fork Rake (cm)	6.0	6.0	5.5	5.5	4.5	4.5	4.5
M Trail (cm)	6	5.6	5.6	5.6	5.8	5.8	5.8
N Stack (cm)	51	53	55	57	59	61	64
O Reach (cm)	36.5	37.1	37.7	38.2	38.6	39.3	40.2




Synapse Alloy

	44	48	51	54	56	58	61
A Seat Tube Length (cm)	40.0	42.2	44.3	48.0	52.0	55.0	59.0
B Top Tube Horizontal (cm)	50.5	51.7	53.1	54.7	56.3	58.0	60.4
C Head Tube Angle	70.2°	70.8°	71.0°	71.9°	72.1°	72.3°	72.5°
D Seat Tube Angle	74.7°	74.6°	74.3°	73.9°	73.5°	73.0°	72.5°
E Standover (cm)	68.0	70.1	72.2	75.5	78.7	81.6	85.1
F Head Tube Length (cm)	10.4	12.3	14.3	15.9	17.8	20.2	23.2
G Wheelbase (cm)	99.2	99.9	101.0	100.4	101.4	102.5	104.1
H Front Center (cm)	59.1	59.8	60.8	60.2	61.2	62.2	63.8
Chain Stay Length (cm)	41.3	41.3	41.3	41.3	41.3	41.3	41.3
J Bottom Bracket Drop (cm)	7.5	7.5	7.5	7.3	7.3	7.0	7.0
K Bottom Bracket Height (cm)	27.0	27.0	27.0	27.2	27.2	27.5	27.5
∟ Fork Rake (cm)	6.0	6.0	6.0	5.0	5.0	5.0	5.0
M Trail (cm)	6.0	5.7	5.5	6.0	5.9	5.8	5.6
N Stack (cm)	51.0	53.0	55.0	57.0	58.9	60.9	63.9
O Reach (cm)	36.5	37.1	37.6	38.3	38.9	39.4	40.3




Topstone Carbon

	XS	SM	MD	LG	XL
A Seat Tube Length (cm)	41.0	45.8	50.5	55.3	60.0
B Top Tube Horizontal (cm)	52.5	54.4	56.1	57.9	59.6
C Head Tube Angle	70.0°	71.2°	71.2°	71.2°	71.2°
D Seat Tube Angle	73.1°	73.1°	73.1°	73.1°	73.1°
E Standover (cm)	71.5	76.1	80.3	84.3	88.5
F Head Tube Length (cm)	9.7	13.1	16.5	19.8	23.2
G Wheelbase (cm)	99.9	101.0	103.0	104.0	106.0
H Front Center (cm)	59.4	60.4	62.3	64.2	66.0
Chain Stay Length (cm)	41.5	41.5	41.5	41.5	41.5
J Bottom Bracket Drop (cm)	6.9	6.4	6.1	6.1	5.9
K Bottom Bracket Height (cm)	27.3	27.8	28.0	28.0	28.3
L Fork Rake (cm)	5.5	5.5	5.5	5.5	5.5
M Trail (cm)	6.6	5.8	5.8	5.8	5.8
N Stack (cm)	51.8	54.9	57.9	61.0	64.0
O Reach (cm)	36.8	37.7	38.5	39.4	40.2



Topstone

	XS	SM	MD	LG	XL
A Seat Tube Length (cm)	41.0	45.8	50.5	55.3	60.0
B Top Tube Horizontal (cm)	52.5	54.4	56.1	57.9	59.6
C Head Tube Angle	70°	71°	71°	71°	71°
D Seat Tube Angle	73.1°	73.1°	73.1°	73.1°	73.1°
E Standover (cm)	70.3	74.4	78.4	82.5	86.3
F Head Tube Length (cm)	8.9	11.8	14.9	18.2	21.4
G Wheelbase (cm)	101.1	102.2	104.0	106.0	107.8
H Front Center (cm)	59.3	60.3	62.1	64.1	65.9
Chain Stay Length (cm)	43.0	43.0	43.0	43.0	43.0
J Bottom Bracket Drop (cm)	7.5	7.5	7.5	7.5	7.5
K Bottom Bracket Height (cm)	28.4	28.4	28.4	28.4	28.4
∟ Fork Rake (cm)	5.5	5.5	5.5	5.5	5.5
M Trail (cm)	7.2	6.5	6.5	6.5	6.5
N Stack (cm)	51.8	54.9	57.9	61.0	64.0
O Reach (cm)	36.8	37.7	38.5	39.4	40.2





Mountain

TRAIL CROSS COUNTRY



Mountain Line-Up

Trail



JEKYLL 29

HABIT





TRAIL

TANGO

Cross Country



Jekyll 29



Category Mountain | Trail

Sizes SM, MD, LG, XL Wheel / Tire Size

Travel (F) 150mm (R) 150mm

Rage Ready

A quick, nimble and precise enduro sledgehamnmer. Climb up, sear down and devour everything between.

Key Benefits

Dialed Geometry

Confident, point-and-shoot control from the long reach, slack head angle and reduced-offset fork, while the steep seat angle and short stays help you put the power down on the climbs.

The Ai Advantage

Our Ai Offset Drivetrain opens up the rear triangle for more tire clearance, while keeping the chainstays short for nimble agility. A stiffer, stronger rear wheel is just icing on the cake.

Link Up

A link-driven leverage ratio provides response and support throughout the stroke, keeping suspension active while retaining the stiffness, reliability and supple top stroke of a single-pivot design.



Jekyll Carbon 29 2 RRP \$7199

MAXXI

			1
Frame	BallisTec Carbon front triangle, SmartForm C1 Alloy	Chain	SRA
	swingarm, 150mm travel, Ai offset drivetrain, ISCG05,	Rear Cogs	SRA
	PF30-83, flat mount brake, tapered headtube	Rear Derailleur	SRA
Fork	Fox Float Performance 36, 150mm, Grip2 Damper,	Shifters	SRA
	3-Pos adj., 15×110, tapered steerer, 42mm offset	Handlebar	Can
Rear Shock	Fox Float Factory DPX2 EVOL w/ Gemini dual mode		rise,
	air spring system (Flow Mode - 150mm / Hustle	Grips	Fabr
	Mode - 120mm, Remote Activated) 3-Pos adj.	Stem	Can
Rims	Stan's NoTubes Flow MK3, 32h, tubeless ready	Headset	Inte
Hubs	Formula 15×110 SRAM 900 12×148 w/ XD driver		
Spokes	DT Swiss Champion	Brakes	SRA
Tires	Maxxis Assegai, 29 × 2.5", 3C Compound, Max	Brake Levers	SRA
Thes	EXO puncture protection, tubeless ready	Saddle	Fabr
		Seatpost	Can
Pedals	Not Included	·	31.6
Crank	Truvativ Stylo 7K DUB, 30T, Ai offset	Sizes	S, M
Bottom Bracket	SRAM DUB PF30 MTB83		
		Color 1	Cool

	C2120
Chain	SRAM GX Eagle, 12-speed
Rear Cogs	SRAM XG-1275, GX Eagle, 10-50, 12-speed
Rear Derailleur	SRAM X01 Eagle
Shifters	SRAM GX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy Locking Grips
Stem	Cannondale 1, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	SRAM Code R hydro disc, 200/180mm Centerline rotors
Brake Levers	SRAM Code R hydro disc
Saddle	Fabric Scoop Shallow Elite, cro-mo rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M-XL)
Sizes	S, M, L, XL
Color 1	Cashmere (CAS)

MAXXIS

Jekyll Carbon 29 3



Frame	BallisTec Carbon front triangle, SmartForm C1 Alloy swingarm, 150mm travel, Ai offset drivetrain, ISCG05, PF30-83, flat mount brake, tapered headtube
Fork	Fox Float Performance 36, 150mm, Grip Damper, 3-Pos adj., 15×110, tapered steerer, 44mm offset
Rear Shock	Fox Float Performance DPX2 EVOL, 3-Pos adj.
Rims	Stan's NoTubes Flow S1, 32h, tubeless ready
Hubs	Formula 15×110 Formula 12×148 w/ HG driver 12×148
Spokes	DT Swiss Champion
Tires	Maxxis Assegai, 29 × 2.5", Dual compound, EXO puncture protection, tubeless ready
Pedals	Not Included
Crank	Truvativ Stylo 6K DUB, 30T, Ai offset
Bottom Bracket	SRAM DUB PF30 MTB83
Chain	SRAM NX Eagle, 12-speed

Rear Cogs	SRAM PG-1230, NX Eagle, 11-50, 12-speed
Rear Derailleur	SRAM GX Eagle
Shifters	SRAM GX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm
	rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy Locking Grips
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	SRAM Guide RE hydro disc, 200/180mm Centerline rotors
Brake Levers	SRAM Guide RE hydro disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing,
	31.6, 125mm (S), 150mm (M-XL)
Sizes	S, M, L, XL
Color 1	Graphite (GRA)

Habit



Category Mountain | Trail

Sizes

Women's XS (27.5"), SM, MD (29")

Wheel / Tire Size 27.5/29 x(F) 2.5 (R) 2.3

Travel

Models 1 thru 5 (F) 140mm (R) 130mm

Model 6 (F) 130mm (R) 130mm

Men's SM, MD, LG, XL (29")

Second Nature

A trail bike with its priorities straight: progressive design, playful agility and killer capability – all in the name of fun.

Key Benefits

Flow Seeker

The head angle is slack, the stays are short and the seat angle is steep. It's that long, low modern geometry that helps you wring a little more flow out of every kind of trail.

One Size Doesn't Fit All

Riders come in all sizes. Proportional Response is the only design that addresses this fact, tailoring the suspension layout by size so that every rider gets optimal traction, suppleness and control.

The Right Stuff

29" wheels with big, grippy tires. Properly wide bars and properly short stems. Powerful brakes and dropper posts. Straightforward parts for straightforward performance.







Habit Carbon 1

MAXXIS

rrp **\$9199**

			С23100М
Frame	130mm travel, BallisTec Carbon Frame and Swingarm,	Chain	Shimano XTR, 12-speed
	Proportional Response Tuned, Ai offset drivetrain,	Rear Cogs	Shimano XTR, 10-51, 12-speed
	ISCG05, PF30, Post mount brake, tapered headtube	Rear Derailleur	Shimano XTR, Shadow Plus
Fork	RockShox Pike Ultimate RC2, 140mm, DebonAir,	Shifters	Shimano XTR, 12-speed
	15×110, tapered steered, 51mm offset	Handlebar	Cannondale 1 Riser, Carbon, 15mm rise, 9° sweep, 4° rise, 780mm
Rear Shock	RockShox Super Deluxe Ultimate RCT, DebonAir	Grips	Fabric Funguy Locking Grips
Rims	Stan's NoTubes ARCH MK3, 32h, tubeless ready	Stem	Cannondale 1, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
Hubs	(F) Hollowgram 28H 15×110 (R) Hollowgram w/ DT 54T Star Ratchet, 12×148 w/ Micro Spline	Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Spokes	DT Swiss Competition, straight pull (Ai Offset dish - rear)	Brakes	Shimano XTR Trail, 4 piston, 180/180mm RT900 rotors
Tires	(F) Maxxis Minion DHF 29 × 2.5" WT, 3C compound,	Brake Levers	Shimano XTR Trail hydro disc
Tires	MaxXis Minior DH 29 × 2.5 W1, 30 compound, Max Terra, EXO puncture protection, tubeless ready	Saddle	Fabric Scoop Shallow Race, ti rails
	(R) Maxxis High Roller II 29 × 2.3", 3C compound, Max	Seatpost	Cannondale DownLow Dropper, internal routing,
	Terra, EXO puncture protection, tubeless ready		31.6, 125mm (S), 150mm (M-XL)
Pedals	Not Included	Sizes	S, M, L, XL
Crank	HollowGram, BB30 w/ X-Sync® SpideRing, 30T, Ai offset	Color 1	Agave (AGV)

Bottom Bracket Cannondale Alloy PressFit30

Habit Carbon 2



Frame	130mm travel, BallisTec Carbon front triangle, SmartForm C1 Alloy swingarm, Proportional Response Tuned, Ai offset drivetrain, ISCG05, PF30, Post mount brake, tapered headtube
Fork	RockShox Pike Select+ RC, 140mm, DebonAir, 15×110, tapered steered, 51mm offset
Rear Shock	RockShox Select Deluxe+ RT, DebonAir
Rims	Stan's NoTubes ARCH MK3, 32h, tubeless ready
Hubs	(F) Hollowgram 15×110 (R) Hollowgram w/ DT internals 12×148 w/ XD driver
Spokes	DT Swiss Competition, straight pull (Ai Offset dish - rear)
Tires	 (F) Maxxis Minion DHF 29 × 2.5" WT, 3C compound, Max Terra, EXO puncture protection, tubeless ready (R) Maxxis High Roller II 29 × 2.3", 3C compound, Max Terra, EXO puncture protection, tubeless ready
Pedals	Not Included
Crank	Truvativ Stylo 7K DUB, 30T, Ai offset
Bottom Bracket	SRAM DUB PF30 MTB83

	C23200M
Chain	SRAM XX1 Eagle Gold, 12-speed
Rear Cogs	SRAM XG-1275, GX Eagle, 10-50, 12-speed
Rear Derailleur	SRAM X01 Eagle
Shifters	SRAM GX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm
	rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy Locking Grips
Stem	Cannondale 1, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	SRAM G2 RSC hydro disc, 180/180mm Centerline rotors
Brake Levers	SRAM G2 RSC hydro disc
Saddle	Fabric Scoop Shallow Elite, cro-mo rails
Seatpost	Cannondale DownLow Dropper, internal routing,
	31.6, 125mm (S), 150mm (M-XL)
Sizes	S, M, L, XL
Color 1	Black Pearl (BPL)

XXIS

Habit Carbon SE

rrp \$6499

Frame	130mm travel, BallisTec Carbon front triangle, SmartForm C1 Alloy swingarm, Proportional Response Tuned, Ai offset drivetrain, ISCG05, PF30, Post mount brake, tapered headtube
Fork	RockShox Lyrik Select +, 140mm, DebonAir, 15×110, tapered steerer, 51mm offset
Rear Shock	RockShox Super Deluxe Select + RT, DebonAir
Rims	Stan's NoTubes ARCH S1, 32h, tubeless ready
Hubs	(F) Formula 15×110 (R) Formula 12×148 w/ HG driver 12×148
Spokes	DT Swiss Champion
Tires	(F) (F) Maxxis Assegai, 29 × 2.5", Dual compound, EXO puncture protection, tubeless ready (R) (R) Maxxis Minion DHR II 29 × 2.4" WT, Dual compound, EXO puncture protection, tubeless ready
Pedals	Not Included
Crank	Truvativ Stylo 6K DUB, 30T, Ai offset
Bottom Bracket	SRAM DUB PF30 MTB83
Chain	SRAM NX Eagle, 12-speed

	С23250М
Rear Cogs	SRAM PG-1230, NX Eagle, 11-50, 12-speed
Rear Derailleur	SRAM GX Eagle
Shifters	SRAM NX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Cannondale Super Tacky
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	SRAM Code R hydro disc, 200/180mm Centerline rotors
Brake Levers	SRAM Code R hydro disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M-XL)
Sizes	S, M, L, XL
Color 1	Chameleon (CML)

PTPT

Habit 5

rrp \$3999



Frame	130mm travel, SmartForm C1 Alloy, Proportional
	Response Tuned, Ai offset drivetrain, ISCG05, BSA
	83, Post mount brake, tapered headtube
Fork	RockShox 35 Gold RL, 140mm, DebonAir, 51mm offset
Rear Shock	Fox Float Performance DPS EVOL, 3-Pos adj.
Rims	WTB STX i23 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400 15×110 (R) Shimano MT400 12×148
Spokes	Stainless Steel, 14g (Ai Offset Dish - rear)
Tires	(F) Maxxis Minion DHF 29 × 2.5" WT, Dual compound, EXO puncture protection, tubeless ready (R) Maxxis High Roller II 29 x 2.3", Dual compound, EXO puncture protection, tubeless ready
Pedals	Not Included
Crank	SRAM X1-1000 Eagle DUB, 30T, Ai offset
Bottom Bracket	SRAM DUB BSA MTB83
Chain	SRAM SX Eagle, 12-speed

	C23500M
Rear Cogs	SRAM PG-1210, SX Eagle, 11-50, 12-speed
Rear Derailleur	SRAM SX Eagle
Shifters	SRAM SX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy Locking Grips
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	Shimano MT200 hydro disc, 180/180mm RT30 rotors
Brake Levers	Shimano MT200 hydro disc
Saddle	Cannondale Stage 3
Seatpost	TranzX dropper, internal routing, 31.6, 100mm (S), 125mm (M-XL)
Sizes	S, M, L, XL
Color 1	Mantis (MAT)

cannondale

Habit Carbon Women's 1

MAXXIS

rrp **\$**5499



MAXXIS

Frame	130mm travel, BallisTec Carbon front triangle, SmartForm C1 Alloy swingarm, Proportional Response Tuned, Ai offset drivetrain, ISCG05, PF30, Post mount brake, tapered headtube
Fork	Fox Float Performance 34, 140mm, Grip Damper, Sweep adj., 15×110, tapered steerer, 51/44mm offset
Rear Shock	Fox Float Performance DPS EVOL, 3-Pos adj.
Rims	Stan's NoTubes ARCH S1, 32h, tubeless ready
Hubs	(F) Formula 15×110 (R) Formula 12×148 w/ HG driver 12×148
Spokes	DT Swiss Champion
Tires	(F) Maxxis Minion DHF 29 × 2.5" WT, Dual compound, EXO puncture protection, tubeless ready (R) Maxxis High Roller II 29 x 2.3", Dual compound, EXO puncture protection, tubeless ready
Pedals	Not Included
Crank	Truvativ Stylo 6K DUB, 30T, Ai offset
Bottom Bracket	SRAM DUB PF30 MTB83
Chain	SRAM NX Eagle, 12-speed

		C23100F
Rear Cogs	SRAM PG-1230, NX Eagle, 11-50, 12-speed	
Rear Derailleur	SRAM GX Eagle	
Shifters	SRAM NX Eagle, 12-speed	
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm	
Grips	Fabric FunGuy Locking Grips	
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0°	
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings	
Brakes	SRAM Guide R hydro disc, 180/180mm Centerline rotors	
Brake Levers	SRAM Guide R hydro disc	
Saddle	Fabric Scoop Women's Sport, 155mm width, steel rails	
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 100mm (XS), 125mm (S, M)	
Sizes	XS (27.5"), S, M (29")	
Color 1	Champagne (CHP)	

MOUNTAIN | TRAIL

ALL-NEW



Category Mountain | Trail

Sizes XS, S (27.5") M, L, XL, 2XL (29") Wheel / Tire Size

Travel

27.5"x2.25" (XS, S) 29"x2.25" (M, L, XL, 2XL)

100mm

Level Up

With beautifully crafted frames, progressive geometry and seriously dirt-ready components, Trail hardtails are built to take your riding to the next level, from your first time off-road to your next big adventure.

Key Benefits

Perfectly Framed

Light and lively, stiff and snappy. The Trail frames showcase our decades of expertise in aluminum craftsmanship. For MY20, a new frame brings Trail handling and performance to more pricepoints than ever. Trail 1 thru 3: Existing frame - SmartForm C2 Alloy, tapered headtube, Boost QR spacing, flat mount disc Trail 4 thru 8: New frame - SmartForm C3 Alloy, 1-1/8' headtube, standard QR spacing, post mount disc

Confident Handling

Dirt-Tailored Geometry brings both quickness and composure. Short chainstays for agility and traction, a slack head angle for unwavering stability, plus wide bars and a short stem for total control.

Real Deal

Trail is sweetly priced, but make no mistake — wide range gearing, powerful disc brakes and durable wheels and tires contribute to big trail readiness. Naming this bike was a no-brainer.



Trail 2				
RRP \$1999				226200M
Frame	SmartForm C2 Alloy, SAVE, Boost spacing,	Shifters	SRAM SX Eagle, 12-speed	
	tapered 1-1/8" to 1.5" headtube, flat mount brake, StraightShot internal cable routing, BSA-73	Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 760mm	
Fork	RockShox Judy Gold RL, 120mm, Fast Black Uppers, Solo Air,	Grips	Cannondale Locking Grips	
FOIR	15×110, tapered steerer, 42mm offset (27.5") 51mm offset (29")	· ·		
Rims	WTB STX i23 TCS, 32h, tubeless ready	Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp	
Hubs	(F) Shimano MT400 15×110 (R) MT200 Boost 141 QR	Headset Brakes	Semi Integrated, 1-1/8" to 1-1/2"	
Spokes	Stainless Steel, 14g		Shimano MT400 hydro disc, 180/160mm RT30 rotors	
Tires	WTB Breakout Comp, 27.5/29 × 2.3", DNA Compound	Brake Levers	Shimano MT400 hydro disc	
Pedals	Cannondale Platform	Saddle	Cannondale Stage 3	
Crank		Seatpost	TranzX dropper, internal routing, 31.6, 80mm	
	SRAM SX Eagle, 30T	0	(XS), 100mm (S), 120mm (M-XL)	
	Truvativ Power Spline	Connectivity	Wheel Sensor	
Chain	SRAM SX Eagle, 12-speed	Sizes	(27.5) XS, S (29) M, L, XL, 2XL	
Rear Cogs	SRAM PG-1210, SX Eagle, 11-50, 12-speed	Color 1	Acid Red (ARD)	
Rear Derailleur	SRAM SX Eagle			

Trail 3

RRP \$1599



SRAM SX Eagle

Rear Derailleur

Trail 4				
RRP \$1299				C26400M
Frame	SmartForm C2 Alloy, SAVE, Boost spacing, tapered 1-1/8" to 1.5" headtube, flat mount brake,	Rear Derailleur	Shimano Deore GS	
	StraightShot internal cable routing, BSA-73	Shifters Handlebar	Shimano Deore, 10-speed Cannondale 3 Riser, 6061 Alloy, 15mm	
Fork	RockShox XC30 TK 29"/27.5", 100mm, rebound, 1-1/8",	Handlebar	rise, 8° sweep, 4° rise, 760mm	
	Coil, 42mm offset (27.5") 51mm offset (29")	Grips	Cannondale Dual-Density	
Rims	WTB STX i23 TCS, 32h, tubeless ready	Stem	6061 Alloy, 31.8, 6°	
Hubs	(F) Shimano MT200 15×110 (R) MT200 Boost 141 QR	Headset	Semi Integrated, 1-1/8" reducer	
Spokes	Stainless Steel, 14g	Brakes	Shimano MT200 hydro disc, 180/160mm RT10 rotors	
Tires	WTB Ranger Comp, 27.5/29 × 2.25", DNA Compound	Brake Levers	Shimano MT200 hydro disc	
Pedals	Cannondale Platform	Saddle	Cannondale Stage 3	
Crank	FSA Alpha Drive, 30T	Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350/400mm	
Bottom Bracket	Sealed Cartridge	Sizes	(27.5) XS, S (29) M, L, XL	
Chain	KMC X10, 10-speed	Color 1	Crush (CRU)	
Rear Cogs	Sunrace, 11-42, 10-speed	·		

Trail 5

rrp **\$999**



Frame	All-New, SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, BSA-73
Fork	SR Suntour XCM-RL, 100mm, hydraulic cable actuated lockout, Coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	Shimano QR
Spokes	Stainless Steel, 14g
Tires	WTB Ranger Comp, 27.5/29 × 2.25", DNA Compound
Pedals	Cannondale Platform
Crank	FSA Alpha Drive, 36/22
Bottom Bracket	Sealed Cartridge
Chain	KMC X9, 9-speed
Rear Cogs	Sunrace, 11-36, 9-speed
Front Derailleur	Shimano Altus, 34.9 clamp

	C26500M
Rear Derailleur	Shimano Acera
Shifters	Shimano Altus, 2×9
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 720mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 6°
Headset	Semi Integrated, 1-1/8"
Brakes	Shimano MT200 hydro disc, 160/160mm RT10 rotors
Brake Levers	Shimano MT200 hydro disc
Saddle	Cannondale Stage 3
Seatpost	6061 Alloy, 31.6 × 350mm
Sizes	(27.5) XS, S (29) M, L, XL
Color 1	Graphite (GRA)



Trail 7 RRP \$799			
Frame	All-New, SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post	Rear Derailleur	Shimano TX800
	mount disc, StraightShot internal cable routing, BSA-73	Shifters	Shimano Altus Rapidfire Plus, 3×8
Fork	SR Suntour XCT DS, 100mm, Coil, 42mm offset (27.5") 46mm offset (29")	Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 720mm
Rims	WTB SX19, 32h	Grips	Cannondale Dual-Density
Hubs	Sealed Alloy Disc, QR	Stem	6061 Alloy, 31.8, 8°
Spokes	Stainless Steel, 14g	Headset	Semi Integrated, 1-1/8"
Tires	WTB Ranger Comp, 27.5/29 × 2.25", DNA Compound	Brakes	Tektro M275 hydro disc, 160/160mm rotors
Pedals	Cannondale Platform	Brake Levers	Tektro M275 hydro disc
Crank	Prowheel Alloy, 42/32/22	Saddle	Cannondale Stage 2
Bottom Bracket	Sealed Cartridge	Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350/400mm
Chain	KMC Z72, 8-speed	Sizes	(27.5) XS, S (29) M, L, XL
Rear Cogs	Sunrace, 11-34, 8-speed	Color 1	Acid Red (ARD)
Front Derailleur	Shimano Altus, 34.9 clamp		

Trail 8

rrp \$699

Bottom Bracket Sealed Cartridge

Chain

Rear Cogs

KMC Z51, 7-speed

Front Derailleur Shimano TY300, 34.9 clamp

Sunrace, 11-34, 7-speed



Seatpost

Sizes

Color 1

Cannondale 3, 6061 Alloy, 31.6 × 350/400mm

C26700M

Trail Tango



Category Mountain | Trail

Sizes

Model 2: XS, S, M (27.5")

Models 4-6: XS, S (27.5"), M (29") Wheel / Tire Size

27.5"x2.25" (XS, S) 29"x2.25" (M, L) Travel

100mm

With beautifully crafted frames, progressive geometry and seriously dirt-ready components, Trail hardtails are built to take your riding to the next level, from your first time off-road to your next big adventure.

Key Benefits

Perfectly Framed

Light and lively, stiff and snappy. The Trail frames showcase our decades of expertise in aluminum craftsmanship. For MY20, a new frame brings Trail handling and performance to more pricepoints than ever.

Confident Handling

Dirt-Tailored Geometry brings both quickness and composure. Short chainstays for agility and traction, a slack head angle for unwavering stability, plus wide bars and a short stem for total control.

Real Deal

Trail is sweetly priced, but make no mistake — wide range gearing, powerful disc brakes and durable wheels and tires contribute to big trail readiness. Naming this bike was a no-brainer.



Trail Ta	ango 2		
Frame	SmartForm C2 Alloy, SAVE, Boost spacing,	Rear Derailleur	Shimano Deore GS
	tapered 1-1/8" to 1.5" headtube, flat mount brake, StraightShot internal cable routing, BSA-73	Shifters	Shimano Deore, 10-speed
Fork	RockShox XC30 TK 27.5", 100mm, rebound,	Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm
FOIR	1-1/8", Coil, 42mm offset	Onina	rise, 8° sweep, 4° rise, 740mm
Rims	WTB STX i23 TCS, 32h, tubeless ready	Grips Stem	Cannondale Dual-Density
Hubs	(F) Shimano MT200 15×110 (R) MT200 Boost 141 QR	Headset	6061 Alloy, 31.8, 6° Semi Integrated, 1-1/8" reducer
Spokes	Stainless Steel, 14g	Brakes	Shimano MT200 hydro disc, 180/160mm RT10 rotors
Tires	WTB Ranger Comp, 27.5/29 × 2.25", DNA Compound	Brakes Brake Levers	Shimano MT200 hydro disc
Pedals	Cannondale Platform	Saddle	Cannondale Stage 3 Women's Ergo
Crank	FSA Alpha Drive, 30T	Seatpost	6061 Alloy, 31.6 × 350mm
	Sealed Cartridge	Sizes	(27.5) XS, S, M
Chain	KMC X10, 10-speed	Color 1	Graphite (GRA)
Rear Cogs	Sunrace, 11-42, 10-speed		anopinto (ani y

Trail Tango 4

rrp **\$899**



Seatpost

Sizes

Color 1

6061 Alloy, 31.6 × 350mm

(27.5) XS (29) S,M, L

Electric Blue (ELB)

Rear Cogs Sunrace, 11-34, 8-speed Front Derailleur Shimano Altus, 34.9 clamp

KMC X8, 8-speed

Bottom Bracket Sealed Cartridge

cannondale

Chain

Trail Ta	ango 6		
Frame	All-New, SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post	Rear Derailleur	Shimano TX800
	mount disc, StraightShot internal cable routing, BSA-73	Shifters	Shimano Easy Fire EF41, 3×7
Fork	SR Suntour M3030, 75mm, Coil, 42mm offset (27.5") 46mm offset (29")	Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 720mm
Rims	WTB SX19, 32h	Grips	Cannondale Dual-Density
Hubs	Sealed Alloy Disc, QR	Stem	6061 Alloy, 31.8, 8°
Spokes	Stainless Steel, 14g	Headset	Semi Integrated, 1-1/8"
Tires	WTB Ranger Comp, 27.5/29 × 2.25", DNA Compound	Brakes	Tektro mechanical disc, 160/160mm rotors
Pedals	Cannondale Platform	Brake Levers	Shimano Easy Fire EF41
Crank	Prowheel alloy, 42/34/24	Saddle	Cannondale Stage 2 Women's
Bottom Bracket	Sealed Cartridge	Seatpost	6061 Alloy, 31.6 × 350mm
Chain	KMC Z51, 7-speed	Sizes	(27.5) XS, S (29) M, L
Rear Cogs	Sunrace, 11-34, 7-speed	Color 1	Turqoise (TRQ)
Front Derailleur	Shimano TY300, 34.9 clamp		





Category

Sizes

Mountain | Cross Country Men's: S (27.5) M, L, X (29) Wheel / Tire Size 27.5×2.25" (S) 29×2.25" (M, L, XL) Travel

(F) 100mm (R) 100mm

Declare Victory

The ultimate XC race bike. Built to win on today's aggressive World Cup courses or rule your local loop.

Key Benefits

Course-Slaying Geometry

All the precision and quickness you expect from a top XC rig, but with unreal stability and traction. Go full gas where others hesitate.

Full-Throttle Efficiency

One of the lightest dual suspension bikes in the world. Taut, tuned chassis stiffness and supple yet supportive suspension let you own the climbs, rule the descents and crush the sprints.

The Best XC Fork...Period

Simply the most advanced, smoothest, most precise-handling ultralight XC fork ever made. Its one-of-a-kind design lets it float through the chop and steer through the chunder like nothing else.



Scalpel Si Hi-MOD World Cup

RRP \$13999

			C24100M
Frame	BallisTec Hi-MOD Carbon, 100mm travel, Zero Pivot seatstay,	Chain	SRAM XX1 Eagle, 12-speed
	Carbon Link, PF30-83, 1.5 Si head tube, Ai Offset	Rear Cogs	SRAM XG-1299, 10-50, 12-speed
Fork	Lefty Ocho Carbon, 27.5/29", 100mm, Chamber	Rear Derailleur	SRAM XX1 Eagle AXS
	Damper with cable lockout, OppO Spring System,	Shifters	SRAM Eagle AXS, 12-speed
	tapered steerer, 50/55mm offset	Handlebar	ENVE M5, Carbon, 760mm, 31.8mm, 5mm rise, 9° sweep
Rear Shock	Fox Float Factory DPS EVOL, 100mm,	Grips	Cannondale Locking Grips
Rims	remote-actuated, Kashima coating ENVE M525 Carbon, 24h, tubeless ready	Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°
		Headset	Integrated, 1-1/8 to 1.5", sealed angular contact
Hubs	(F) Lefty 60 (R) DT Swiss C36 12×142 rear w/ XD Driver		bearings (Integrated steer stop size small only)
Spokes	DT Swiss Aerolite (Ai Offset dish - rear)	Brakes	SRAM Level Ultimate hydro disc, 180/160mm Centerline rotors
Tires	(F) Schwalbe Racing Ray 27.5/29 × 2.25", Snake	Brake Levers	SRAM Level Ultimate hydro disc
	Skin, Addix Speedgrip Compound, tubeless ready (R) Schwalbe Racing Ralph 27.5/29 × 2.25", Snake	Saddle	Prologo Zero II, Tirox rails
	Skin, Addix Speed Compound, tubeless ready	Seatpost	ENVE Carbon, 31.6 × 400mm, 0mm offset
Pedals	Not Included	Connectivity	Wheel Sensor
Crank	SRAM XX1 Eagle DUB, 34T, Ai offset	Sizes	S, M, L, XL
Bottom Bracket	SRAM DUB PF30 MTB83	Color 1	Replica (REP)

Inonda

Bracket SRAM DUB PF30 MTB83

Scalpel Si Hi-MOD 1

-rrp \$9499

Frame	BallisTec Hi-MOD Carbon, 100mm travel, Zero Pivot seatstay, Carbon Link, PF30-83, 1.5 Si head tube, Ai Offset	Bottor Chain
Fork	Lefty Ocho Carbon, 27.5/29", 100mm, Chamber Damper with cable lockout, OppO Spring System, tapered steerer, 50/55mm offset	Rear C Rear D Shifte
Rear Shock	Fox Float Factory DPS EVOL, 100mm, remote-actuated, Kashima coating	Handle
Rims	HollowGram 23, Superlight Hi-Impact Carbon, 28h, 23mm inner width, tubeless ready	Stem
Hubs	(F) Lefty 60 (R) Hollowgram w/ DT internals 12×142 w/ Micro Spline	Heads
Spokes	DT Swiss Competition Race (Ai Offset dish - rear)	Brakes
Tires	(F) Schwalbe Racing Ray 27.5/29 × 2.25", Snake	Brake
	Skin, Addix Speedgrip Compound, tubeless ready	Saddle
	(R) Schwalbe Racing Ralph 27.5/29 × 2.25", Snake	Seatpo
	Skin, Addix Speed Compound, tubeless ready	Conne
Pedals	Not Included	Sizes
Crank	HollowGram, BB30 w/X-Sync® SpideRing, 34T, Ai offset	Color 1

		C24150M
Bottom Bracket	Cannondale Alloy PressFit30	
Chain	Shimano XTR, 12-speed	
Rear Cogs	Shimano XT, 10-51, 12-speed	
Rear Derailleur	Shimano XTR, Shadow Plus	
Shifters	Shimano XTR, 12-speed	
Handlebar	ENVE M5, Carbon, 760mm, 31.8mm, 5° rise, 9° sweep	
Grips	Cannondale Locking Grips	
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°	
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings (Integrated steer stop size small only)	
Brakes	Shimano XTR Race, 180/160mm Ice Tech rotors	
Brake Levers	Shimano XTR Race	
Saddle	Fabric Scoop Flat Race, titanium rails	
Seatpost	ENVE Carbon, 31.6 × 400mm, 0mm offset	
Connectivity	Wheel Sensor	
Sizes	S, M, L, XL	
Color 1	BBQ (BBQ)	

IUP

Scalpel Si Carbon 3

rrp **\$**7499

1	
Frame	BallisTec Carbon, 100mm travel, Zero Pivot seatstay, Carbon Link, PF30-83, 1.5 Si head tube, Ai Offset
Fork	Lefty Ocho, 27.5/29", 100mm, Chamber Damper with cable lockout, OppO Spring System, tapered steerer, 50/55mm offset
Rear Shock	Fox Float DPS Performance EVOL, 100mm, remote-actuated
Rims	HollowGram 23, Superlight Hi-Impact Carbon, 28h, 23mm inner width, tubeless ready
Hubs	(F) Lefty 60 (R) HollowGram 12×142 rear w/ DT Swiss internals, XD driver
Spokes	Formula Grand Forza Stainless, straight pull (Ai Offset dish - rear)
Tires	 (F) Schwalbe Racing Ray 27.5/29 × 2.25", Snake Skin, Addix Speedgrip Compound, tubeless ready (R) Schwalbe Racing Ralph 27.5/29 × 2.25", Snake Skin, Addix Speed Compound, tubeless ready
Pedals	Not Included
Crank	Truvativ Stylo 6K DUB, 34T, Ai offset
Bottom Bracket	SRAM DUB PF30 MTB83

		24300M
Chain	SRAM GX Eagle, 12-speed	
Rear Cogs	SRAM XG-1275, GX Eagle, 10-50, 12-speed	
Rear Derailleur	SRAM X01 Eagle	
Shifters	SRAM GX Eagle, 12-speed	
Handlebar	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm	
Grips	Cannondale Locking Grips	
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°	
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings (Integrated steer stop size small only)	
Brakes	SRAM Level TL hydro disc, 180/160mm Centerline rotors	
Brake Levers	SRAM Level TL hydro disc	
Saddle	Fabric Scoop Flat Elite, cro-mo rails	
Seatpost	Cannondale 2, 7075 Alloy, 31.6 × 400mm	
Connectivity	Wheel Sensor	
Sizes	S, M, L, XL	
Color 1	Acid Red (ARD)	

1111

Scalpel Si Carbon 4

rrp \$5499




Frame	BallisTec Carbon, 100mm travel, Zero Pivot seatstay, Carbon Link, PF30-83, 1.5 Si head tube, Ai Offset
Fork	Lefty Ocho, 27.5/29", 100mm, Chamber Damper with cable lockout, OppO Spring System, tapered steerer, 50/55mm offset
Rear Shock	RockShox Monarch RL
Rims	Stan's NoTubes Crest S1, 28h, tubeless ready
Hubs	(F) Lefty 60 (R) Formula 12×142 w/ HG driver
Spokes	DT Swiss Competition (Ai Offset dish - rear)
Tires	(F) Schwalbe Racing Ray Performance 27.5/29 × 2.25", Addix Compound, tubeless ready (R) Schwalbe Racing Ralph Performance 27.5/29 × 2.25", Addix Compound, tubeless ready
Pedals	Not Included
Crank	Truvativ Stylo 6K DUB, 34T, Ai offset
Bottom Bracket	SRAM DUB PF30 MTB83
Chain	SRAM NX Eagle, 12-speed
Rear Cogs	SRAM PG-1230, NX Eagle, 11-50, 12-speed

Rear Derailleur	SRAM GX Eagle
Shifters	SRAM NX Eagle, 12-speed
Handlebar	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings (Integrated steer stop size small only)
Brakes	SRAM Level TL hydro disc, 180/160mm Centerline rotors
Brake Levers	SRAM Level TL hydro disc
Saddle	Fabric Scoop Flat Elite, cro-mo rails
Seatpost	Cannondale 2, 7075 Alloy, 31.6 × 400mm
Connectivity	Wheel Sensor
Sizes	S, M, L, XL
Color 1	Black Pearl (BPL)


Jekyll 29

	SM	MD	LG	XL
A Seat Tube Length (cm)	40.0	43.0	46.0	52.0
B Top Tube Horizontal (cm)	58.6	61.1	63.6	66.4
C Top Tube Actual (cm)	56.8	58.9	61.3	64.1
D Head Tube Angle	65°	65°	65°	65°
E Seat Tube Angle Effective	75°	75°	75°	75°
F Standover (cm)	76.0	76.6	77.6	78.8
G Head Tube Length (cm)	10.2	11.5	12.7	14.0
H Wheelbase (cm)	117.9	120.7	123.4	126.4
Front Center (cm)	73.8	76.5	79.2	82.3
J Chain Stay Length (cm)	44.2	44.2	44.2	44.2
K Bottom Bracket Drop (cm)	1.6	1.6	1.6	1.6
∟ Bottom Bracket Height (cm)	36.0	36.0	36.0	36.0
M Fork Rake (cm)	4.2	4.2	4.2	4.2
N Trail (cm)	13.0	13.0	13.0	13.0
O Stack (cm)	59.8	61.0	62.1	63.3
P Reach (cm)	41.9	44.0	46.2	48.7




Habit

	40	4.4		
	10	44	48	52
3	57.3	60.6	63.9	67.1
6	51.0	54.3	57.9	61.7
)°	66.0°	66.0°	66.0°	66.0°
3°	66.3°	66.3°	66.3°	66.3°
;o	74.5°	74.5°	74.5°	74.5°
	72	75	77	78
	10.5	11.5	12.5	13.5
3	114.2	117.6	121	124.4
)	71.0	74.3	77.8	81.1
5	43.5	43.5	43.5	43.5
	3.8	3.8	3.8	3.8
	33.9	33.9	33.9	33.9
	5.1	5.1	5.1	5.1
	11.2	11.2	11.2	11.2
	60.7	61.6	62.5	63.4
6	40.0	43.0	46.0	49.0
) 30 31 5 5	51.0 0° 66.0° 3° 66.3° ° 74.5° 72 10.5 3 114.2 ° 71.0 5 3.8 33.9 5.1 11.2 60.7	51.0 54.3 b° 66.0° 66.0° b° 66.3° 66.3° b° 74.5° 74.5° 72 75 10.5 11.5 10.5 11.76 74.3° 74.3° 6 43.5 43.5 3.8 3.8 33.9 33.9 33.9 5.1 5.1 11.2 11.2 11.2 10.6 11.6	51.0 54.3 57.9 9° 66.0° 66.0° 66.0° 9° 66.3° 66.3° 66.3° 9° 66.3° 74.5° 74.5° 72 75 77 10.5 11.5 12.5 3 114.2 117.6 121 10.7 74.3 77.8 5 3.8 3.8 3.8 3.8 33.9 33.9 33.9 33.9 5.1 5.1 5.1 1.2 11.2 11.2 11.2 11.2 60.7 61.6 62.5




Scalpel-Si

	XS (27.5")	SM (27.5")MD (29")	LG (29")	XL (29")
A Seat Tube Length (cm)	38	40	44	48	52
B Top Tube Horizontal (cm)	54.8	57	59.9	62.4	64.8
C Head Tube Angle	69.5°	69.5°	69.5°	69.5°	69.5°
D Seat Tube Angle	73.5°	73.5°	73.5°	73.5°	73.5°
E Standover (cm)	71.5	71.6	75.4	76	76.6
F Head Tube Length (cm)	9.7	9.7	11	12.2	13.4
G Wheelbase (cm)	105.7	107.9	111.8	114.4	116.9
H Front Center (cm)	63.1	65.3	68.5	71.1	73.5
Chain Stay Length (cm)	42.5	42.5	43.5	*	*
J Bottom Bracket Drop (cm)	2	2	3.8	*	*
K Bottom Bracket Height (cm)	33.3	33.3	33.4	*	*
∟ Fork Rake (cm)	5	5	5.5	*	*
M Trail (cm)	7.5	7.5	7.7	*	*
N Stack (cm)	55	55	59.2	60.4	61.5
O Reach (cm)	38.5	40.7	42.4	44.5	46.6




Trail - Models 2-4

	XS (27.5")	S (27.5")	M (29")	L(29")	XL (29")	XXL (29")	
A Seat Tube Length (cm)	34.5	40.0	44.0	48.0	52.0	56.0	
B Top Tube Horizontal (cm)	54.5	58.5	61.0	63.5	66.0	68.5	
C Top Tube Actual (cm)	52.3	56.1	58.7	60.9	63.4	66.1	
D Head Tube Angle	68.0°	*	68.5°	*	*	*	
E Seat Tube Angle Effective	73.5°	*	73.5°	*	*	*	
F Standover (cm)	71.0	74.6	79.5	82.0	85.0	88.0	
G Head Tube Length (cm)	9.5	10.5	11.5	12.5	13.5	14.5	
H Wheelbase (cm)	106.7	110.8	114.0	116.6	119.2	121.8	
Front Center (cm)	63.4	67.5	70.3	72.9	75.4	78.1	
J Chain Stay Length (cm)	44.0	*	44.5	*	*	*	
K Bottom Bracket Drop (cm)	6.0	*	6.5	*	*	×	
∟ Bottom Bracket Height (cm)	30.4	*	30.8	*	*	*	
M Fork Rake (cm)	4.2	*	5.1	*	*	×	
N Trail (cm)	10.2	*	9.2	*	*	*	
O Stack (cm)	60.7	61.6	62.4	63.3	64.3	65.2	
P Reach (cm)	36.5	40.2	42.4	42.5	44.7	47.0	49.2




Trail - Models 5-8

	XS (27.5")	SM (27.5")	MD (29")	LG (29")	XL (29")
A Seat Tube Length (cm)	33.0	38.1	43.2	47.0	52.0
B Top Tube Horizontal (cm)	53.5	57.7	60.9	63.4	65.9
C Top Tube Actual (cm)	N/A	*	*	*	*
D Head Tube Angle	68.0°	*	*	*	*
E Seat Tube Angle	73.5°	*	*	*	*
F Standover (cm)	67.3	71.0	76.8	79.5	83.9
G Head Tube Length (cm)	9.5	*	10.5	11.5	12.5
H Wheelbase (cm)	105.4	109.8	114.0	116.6	119.2
Front Center (cm)	62.1	66.5	70.2	72.8	75.4/29.7
J Chain Stay Length (cm)	44.0	*	44.5	*	*
K Bottom Bracket Drop (cm)	6.0	*	6.5	*	*
∟ Bottom Bracket Height (cm)	29.3	*	30.7	*	*
M Fork Rake (cm)	4.2	*	4.6	*	*
N Trail (cm)	9.7	*	10.1	*	*
O Stack (cm)	57.3	59.1	62.3	63.2	64.1
P Reach (cm)	36.5	40.2	42.5	44.7	46.95




Trail Tango Women's - Model 2

•			
	XS (27.5")	SM(27.5")	MD (27.5")
A Seat Tube Length (cm)	34.5	38.5	42.0
B Top Tube Horizontal (cm)	54.5	57.0	59.5
C Top Tube Actual (cm)	52.26	54.6	57.0
D Head Tube Angle	68.0°	*	*
E Seat Tube Angle Effective	73.5°	*	*
F Standover (cm)	65.4	68.1	70.0
G Head Tube Length (cm)	9.5/3.7	10.0	10.5
H Wheelbase (cm)	107.0	109.5	112.1
Front Center (cm)	63.5	66.1	68.6
」 Chain Stay Length (cm)	44.0	*	*
K Bottom Bracket Drop (cm)	5.5	*	*
∟ Bottom Bracket Height (cm)	30.9	*	*
M Fork Rake (cm)	4.2	*	*
N Trail (cm)	10.2	*	*
O Stack (cm)	60.2	60.7	61.1/24.1
P Reach (cm)	36.7	39.0	41.4/16.3



Trail Tango Women's - Models 4 - 6

	XS (27.5")	S (27.5")	M (29")	L(29")
A Seat Tube Length (cm)	33.0	38.1	43.2	47.0
B Top Tube Horizontal (cm)	53.5	57.7	60.9	63.4
C Top Tube Actual (cm)				
D Head Tube Angle	68.0°	*	*	*
E Seat Tube Angle Effective	73.5°	*	*	*
F Standover (cm)	67.3	71.0	76.8	79.5
G Head Tube Length (cm)	9.5	*	10.5	11.5
H Wheelbase (cm)	105.4	109.8	114.0	116.6
Front Center (cm)	62.1	66.5	70.27	72.8
J Chain Stay Length (cm)	44.0	*	44.5	*
K Bottom Bracket Drop (cm)	6.0	*	6.5	*
L Bottom Bracket Height (cm)	29.3	*	30.7	*
M Fork Rake (cm)	4.2	*	4.6	*
N Trail (cm)	9.7	*	10.1	*
O Stack (cm)	57.3	59.1	62.3	63.2
P Reach (cm)	36.5	40.2	42.5	44.7





Urban



Urban/Fitness Line-Up

Urban



Fitness



Bad Boy



Category Urban

Sizes SM, MD, LG, XL Wheel / Tire Size

Urban Legend

The ultimate urban ride. Elegantly aggressive style. Forward-thinking features. Traffic-slaying performance.

Key Benefits

Get Noticed

Cleanly integrated LED lights in the Lefty LightPipe fork and seatpost ensure that you'll always stand out.

Street Fighter

With its stiff Lefty LightPipe fork, grippy tires, and agile point-andshoot handling, Bad Boy is built to take the city by storm.

Smooth Speed

Big-volume tires on 650b wheels are fast rolling and nimble handling, with crazy cornering grip and pothole-erasing comfort.



Bad Bo	ру		
1	-		
I RRP \$2899			
Frame	SmartForm C1 Alloy OPI, integrated Urban Armor bumper,	Rear Cogs	Gates rear sprocket, 22T
	BSA threaded BB, 1-1/8" headtube, sliding dropout	Shifters	Shimano Alfine Rapidfire, 8-speed
Fork	Lefty LightPipe rigid, integrated SuperNova LED	Handlebar	Cannondale Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 720mm
	lightstrip, USB rechargeable battery, 1-1/8" steerer	Grips	Fabric Silicone Cell
Rims	Cannondale, double wall w/eyelets, 32h	Stem	Bad Boy Si, integrated sandwich stem, 65mm
Hubs	(F) Lefty 50 front / (R) Shimano Alfine 8-speed internal rear	Headset	FSA Cartridge Bearing
Spokes	Stainless Steel, 14g	Brakes	Shimano MT400 hydro disc, 160/160mm RT26 rotors
Tires	WTB Byway, 650b x 40c	Brake Levers	Shimano MT400 hydro disc
Pedals	Cannondale Urban Pedal	Saddle	Fabric Scoop Radius Elite, cro-mo rails
Crank	Gates S150, Gates Belt Drive CDX sprocket 46T	Seatpost	LightSkin w/ integrated rear LED light, 31.6, USB Rechargeable
Bottom Bracket	Thun Zumba	Sizes	S, M, L, XL
Chain	Gates Carbon Drive, CDX Centertrack, 113T	Color 1	BBQ (BBQ)

Bad Boy

2 RRP \$1699



Saddle

Sizes

Color 1

Seatpost

Fabric Scoop Radius Sport, steel rails

S, M, L, XL

BBQ (BBQ)

LightSkin w/ integrated rear LED light, 31.6, USB Rechargeable

Bottom Bracket Shimano MT210

Shimano MT210, 46/30

Sunrace, 11-32, 9-speed

KMC Z9, 9-speed

Crank

Chain

Rear Cogs

Bad B (3 RRP \$1299				СЗЗЗООМ
Frame	SmartForm C2 Alloy, integrated Urban Armor	Rear Derailleur	Shimano Altus	
	bumper, BSA threaded BB, 1-1/8" headtube	Shifters	Shimano Easy Fire EF505, 2×8	
Fork	Lefty Rigid, 1-1/8" steerer	Handlebar	6061 double-butted, 25mm rise, 680mm	
Rims	Cannondale, double wall, 32h	Grips	Cannondale Comfort	
Hubs	(F) Lefty 50 front / (R) Formula DC-1422 QR	Stem	Bad Boy, 6061 alloy, 31.8, 60mm	
Spokes	Stainless Steel, 14g	Headset	Tange Semi-Integrated	
Tires	WTB Byway, 650b x 40c	Brakes	Shimano MT200 hydro disc, 160/160mm RT26 rotors	
Pedals	Cannondale Urban Pedal	Brake Levers	Shimano MT200 hydro disc	
Crank	Shimano, 46/30	Saddle	Cannondale Urban	
Bottom Bracket	Sealed Cartridge	Seatpost	Alloy, 31.6 × 350mm	
Chain	KMC X8, 8-speed	Sizes	S, M, L, XL	
Rear Cogs	Shimano HG41, 11-31, 8-speed	Color 1	BBQ (BBQ)	
Front Derailleur	Shimano Tourney, 31.8 clamp			





Treadwell



Category

Sizes

Fitness

Standard - S, M, L Remixte - S, L Wheel / Tire Size

Nothing beats a bike ride.

The all-new Treadwell is designed to bring a bit of fun and style to the daily runaround. It's a light, simple, responsive bike for rolling around, meeting up with friends, and getting from here to there with that feeling of freedom that only two wheels can give.

Key Benefits

More Fun Days

It's comfy. It's playful. It's easy to get on and off. This is a capable, well-made ride that nods to funky bikes of the past, with handlebars and tires inspired by dirt-track racers.

Connected

An integrated wheel sensor helps track your activity (like speed, distance and calories burned), registers your bike, reminds you of needed service and more, all through the free Cannondale app.

• Nice and Light

Practical doesn't have to mean vanilla. Not with this bike. Light and responsive, it bounds through the city and blasts through the boroughs with style.



. Not wit

Tready EQ RRP \$1500				C37150M
Frame	All-New, SmartForm C3 Alloy, Ride-Easy low-standover geometry, Straightshot hidden cable routing, Urban Armor	Shifters Handlebar	Shimano Altus, 9-speed	
	frame bumpers, flat mount disc, rack/fender mounts	Handlebar	Cannondale Cruise Control riser, 6061 alloy, 31.8mm clamp, 15 degree backsweep, 740mm width	
Fork	All-New, SmartForm C3 Alloy blades, 1-1/8" steerer,	Grips	Cannondale Comfort	
	OutFront offset, flat mount disc, mid-blade mounts	Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp	
Rims	Cannondale, double wall, 32h	Headset	Tange Semi-Integrated	
Hubs	(F) Sealed Alloy Disc, 12×100 / (R) Sealed Alloy Disc, QR	Brakes	Tekro HD-R280 hydraulic disc, 160/140mm rotors	
Spokes	Stainless Steel, 14g	Brake Levers	Tekro hydraulic disc	
Tires	Maxxis DTR-1, 650b x 47c	Saddle	Cannondale Treadwell, 170mm, steel rails	
Pedals	Cannondale Comfort	Seatpost	Alloy, 31.6 × 350mm	
Crank	Prowheel, 38T	Connectivity	Wheel Sensor	
Bottom Bracket	Cartridge Sealed	Sizes	S, M, L	
Chain	KMC X9, 9-speed	Color 1	Agave (AGV)	
Rear Cogs	Sunrace, 11-36, 9-speed	Extras	Alloy fenders, front rack	
Rear Derailleur	Shimano Altus			

Treadwell

3 ввр \$950



cannondale

Treadv	vell			
3 Rem 88950	-			
Frame	All-New, Step-thru, SmartForm C3 Alloy, step-thru Ride-Easy geometry, Straightshot hidden cable routing, Urban Armor	Shifters Handlebar	Shimano Tourney, 7-speed Cannondale Cruise Control riser, 6061 alloy, 31.8mm	C37300U
	frame bumpers, flat mount disc, rack/fender mounts		clamp, 15 degree backsweep, 740mm width	
Fork	All-New, Steel blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade mounts	Grips	Cannondale Comfort	
Rims	Cannondale, double wall, 32h	Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp	
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR	Headset	Tange Semi-Integrated	
Spokes	Stainless Steel, 14g	Brakes	Promax mechanical disc, 160/160mm rotors	
Tires	Maxxis DTR-1, 650b x 47c	Brake Levers	Cannondale Forged alloy	
Pedals	Cannondale Comfort	Saddle	Cannondale Treadwell, 170mm, steel rails	
Crank	Prowheel, 38T	Seatpost	Alloy, 31.6 × 350mm	
	Cartridge Sealed	Connectivity	Wheel Sensor	
Chain	KMC Z51, 7-speed	Sizes	S, L	
Rear Cogs	Sunrace, 11-34, 7-speed	Color 1	Black (BLK)	
Rear Derailleur	Shimano Tourney			

ALL-NEW ALL-NEW



Category

Fitness

Sizes

Women's SM, MD, LG

Men's SM, MD, LG, XL **Wheel / Tire Size** 700 x32/35

Quick As You Like

The new Quick is our all-rounder – a fast, versatile and fun bike that appeals to a wide range of riders. Perfect for enjoying a workout, cruising the city or just getting out and feeling good.

Key Benefits

Feel the Light

Quick bikes are the lightest in their class, making them easier to pedal, easier to lift, and easier to love. For 2020, all Quicks feature a new, updated frame that's lighter weight, with refined SAVE micro-suspension features, easy-to-use StraightShot internal cable routing, and a sleek new look.

Connected

Most Quick models feature an all- new way for riders to connect with the ride experience. An integrated wheel sensor pairs with with a new, free Cannondale App and tracks activity (like speed, distance and calories burned), registers the bike, sends service reminders and more.

Comfortable & Capable

Bump-absorbing SAVE micro-suspension, comfy grips and new pressure-relieving saddles for comfort. 360° reflective accents for visibility. Rack and fender mounts for versatility.



Quick 1 RRP \$1899			
Frame	SmartForm C3 Alloy, SAVE, tapered head tube,	Rear Derailleur	Shimano 105 GS
	Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity	Shifters	Shimano RS700 FB, 2×11
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered	Handlebar	Cannondale Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 640mm
FOIR	steerer, flat mount disc, fender mounts, 360° reflectivity	Grips	Cannondale Ergo Fitness Dual Density, lock-on
Rims	Cannondale Disc, double wall, 32h	Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp
Hubs	(F) Formula CRX-512, 12×100 / (R) Formula CX-22 QR	Headset	FSA Sealed Bearing, Integrated, 1-1/4"-1-1/8"
Spokes	Stainless steel, 14g	Brakes	Shimano MT201 hydro disc, 160/160mm RT56 rotors
Tires	Schwalbe Lugano, 700 × 32c, K-Guard, reflective strip	Brake Levers	Shimano MT201 hydro disc
Pedals	Cannondale Fitness Reinforced Composite	Saddle	Cannondale Quick Ergo Performance
Crank	FSA Omega, 50/34	Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Bottom Bracket		Connectivity	Wheel Sensor
Chain	Shimano HG601, 11-speed	Sizes	S, M, L, XL
Rear Cogs	Shimano 105, 11-32, 11-speed	Color 1	Black Pearl (BPL)
Ŧ	Shimano 105, 31.8 clamp		

Front Derailleur Shimano 105, 31.8 clamp

Quick 2 RRP \$1499

RRP \$1499			
Frame	SmartForm C3 Alloy, SAVE, tapered head tube,	Rear Derailleur	Shimano Sora GS
	Straightshot hidden cable routing, flat mount	Shifters	Shimano Sora 2×9
	disc, rack/fender mounts, 360° reflectivity	Handlebar	Cannondale Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 640mm
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered	Grips	Cannondale Ergo Fitness Dual Density, lock-on
	steerer, flat mount disc, fender mounts, 360° reflectivity	Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp
Rims	Cannondale Disc, double wall, 32h	Headset	FSA Sealed Bearing, Integrated, 1-1/4"-1-1/8"
Hubs	(F) Formula CRX-512, 12×100 / (R) Formula DC-1422 QR	Brakes	Tekro hydraulic disc, 160/140mm rotors
Spokes	Stainless steel, 14g	Brake Levers	Tekro hydraulic disc
Tires	Schwalbe Lugano, 700 × 32c, K-Guard, reflective strip	Saddle	Cannondale Quick Ergo Performance
Dedele	Connondolo Fitagoo Boinforgod Composito		

Seatpost

Cannondale 3, 6061 Alloy, 27.2 × 350mm

Wheel Sensor

S, M, L, XL

Crush (CRU)

Cannondale Fitness Reinforced Composite

Front Derailleur Shimano Sora, 31.8 clamp

cannondale

Pedals

Quick 3 RRP \$1199 C31300M SmartForm C3 Alloy, SAVE, tapered head tube, Frame Rear Derailleur Shimano Altus Straightshot hidden cable routing, flat mount Shifters Shimano Altus, 2×9 disc, rack/fender mounts, 360° reflectivity Cannondale Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 640mm Handlebar Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered Fork Grips Cannondale Ergo Fitness Dual Density, lock-on steerer, flat mount disc, fender mounts, 360° reflectivity Stem Cannondale 3 with Intellimount, alloy, 31.8mm clamp Rims Cannondale Disc, double wall, 32h FSA Sealed Bearing, Integrated, 1-1/4"-1-1/8" Headset Hubs (F) Formula CRX-512, 12×100 / (R) Formula DC-1422 QR Brakes Tektro hydraulic disc, 160/140mm rotors Spokes Stainless steel, 14g Brake Levers Tektro hydraulic disc Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip Tires Saddle Cannondale Fitness Ergo Double Density Pedals Cannondale Fitness Reinforced Composite 6061 Alloy, 27.2 × 350mm Seatpost Crank Prowheel, 48/32 Connectivity Wheel Sensor Bottom Bracket Tange Cartridge, square taper Sizes S, M, L, XL KMC Z9, 9-speed Chain Black Pearl (BPL) Color 1 Sunrace, 11-34, 9-speed Rear Cogs

Front Derailleur Shimano Acera, 31.8mm clamp

Quick 5

RRP \$899


Rear Cogs

Shimano HG200, 12-32, 7-speed

Front Derailleur Shimano Tourney, 31.8 clamp


ннр Ф033			
Frame	SmartForm C3 Alloy, SAVE, tapered head tube,	Rear Derailleur	Shimano Tourney TX
	Straightshot hidden cable routing, flat mount	Shifters	Shimano M315 Rapidfire Plus, 2×7
	disc, rack/fender mounts, 360° reflectivity	Handlebar	6061 double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Fork	Chromoly, 1-1/8" steerer, flat mount disc,	Grips	Cannondale Ergo Fitness Dual Density, lock-on
	fender mounts, 360° reflectivity	Stem	6061 Alloy, 31.8, 8°
Rims	Cannondale Disc, double wall w/eyelet, 32h	Headset	FSA Sealed Bearing, Integrated, 1-1/4"-1-1/8"
Hubs	(F) Sealed Alloy Disc, QR / (R) Formula QR	Brakes	Promax mechanical disc, 160/160mm rotors
Spokes	Stainless steel, 14g	Brake Levers	Promax
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip	Saddle	Cannondale Fitness Ergo Double Density
Pedals	Cannondale Fitness	Seatpost	6061 Alloy, 27.2 × 350mm
Crank	Shimano Tourney, 46/30	Connectivity	Wheel Sensor
Bottom Bracket	Tange Cartridge	Sizes	S, M, L, XL
Chain	KMC Z51, 7-speed	Color 1	Electric Blue (ELB)
Beer Come	Chimana HC200 12-22 7 apaad	001011	

Quick 6 RRP \$749 C31600N Frame SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot Rear Derailleur Shimano Tourney hidden cable routing, rack/fender mounts, 360° reflectivity Shifters Shimano Easy Fire EF41, 3×7 Fork Chromoly, 1-1/8" steerer, fender mounts, 360° reflectivity 6061 double-butted, 25mm rise, 8° sweep, 6° rise, 640mm Handlebar Rims Cannondale, double wall, 32h Grips Cannondale Ergo Fitness Dual Density, lock-on (F) Alloy, sealed, loose ball bearings, 32h, QR / (R) Hubs Stem 6061 Alloy, 31.8, 8° Alloy, sealed, loose ball bearings, 32h, QR Semi-Integrated, cage retainer Headset Spokes Stainless steel, 14a Brakes V-Brake Kenda Kourier, 700 × 35c Tires Brake Levers Shimano Easy Fire EF41 Pedals Cannondale Fitness Saddle Cannondale Fitness Ergo Double Density Crank Shimano Tourney, 48/38/28 6061 Alloy, 27.2 × 350mm Seatpost Bottom Bracket Tange Cartridge Sizes S, M, L, XL KMC Z51, 7-speed Chain Color 1 Acid Green (AGR) Rear Cogs Shimano HG200, 12-28, 7-speed Front Derailleur Shimano Tourney, 31.8 clamp

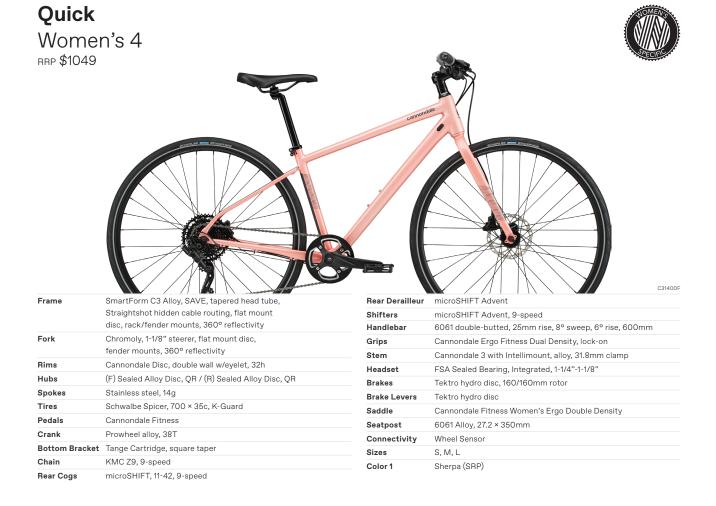

cannondale


Quick Wome BRP \$899	n's 5		<image/>
Frame	Step-Thru, SmartForm C3 Alloy, SAVE, tapered head	Rear Derailleur	-
	tube, Straightshot hidden cable routing, flat mount	Shifters	Shimano M315 Rapidfire Plus, 2×7
	disc, rack/fender mounts, 360° reflectivity	Handlebar	6061 double-butted, 25mm rise, 8° sweep, 6° rise, 600mm
Fork	Chromoly, 1-1/8" steerer, flat mount disc, fender mounts, 360° reflectivity	Grips	Cannondale Ergo Fitness Dual Density, lock-on
Rims		Stem	6061 Alloy, 31.8, 8°
Hubs	Cannondale Disc, double wall w/eyelet, 32h (F) Sealed Alloy Disc, QR / (R) Formula QR	Headset	FSA Sealed Bearing, Integrated, 1-1/4"-1-1/8"
Spokes		Brakes	Promax mechanical disc, 160/160mm rotors
Tires	Stainless steel, 14g Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip	Brake Levers	Promax
Pedals	Cannondale Fitness	Saddle	Cannondale Fitness Women's Ergo Double Density
		Seatpost	6061 Alloy, 27.2 × 350mm
Crank	Shimano Tourney, 46/30	Connectivity	Wheel Sensor
	Tange Cartridge	Sizes	S, M, L
Chain	KMC Z51, 7-speed	Color 1	Graphite (GRA)
Rear Cogs Front Derailleur	Shimano HG200, 12-32, 7-speed Shimano Tourney, 31.8 clamp		

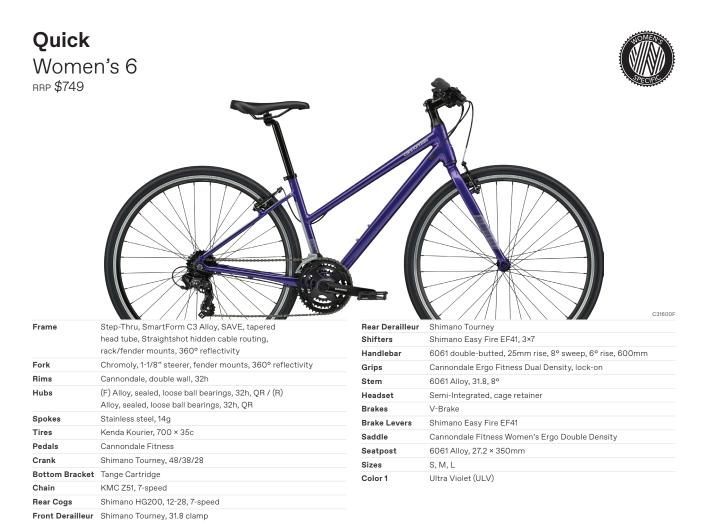

URBAN / FITNESS


Bad Boy

	SM	MD	LG	XL
A Seat Tube Length (cm)	45.0	49.0	52.5	55.0
B Top Tube Horizontal (cm)	56.0	59.2	61.8	65.0
C Top Tube Actual (cm)	NA	NA	NA	NA
D Head Tube Angle	70°	70°	70°	70°
E Seat Tube Angle	73.5°	73.5°	73.5°	73.5°
F Standover (cm)	76.2	79.2	83.3	85.8
G Head Tube Length (cm)	43.5	43.5	43.5	43.5
H Wheelbase (cm)	103.6	107.0	109.9	113.3
Front Center (cm)	60.6	64.0	66.9	70.3
J Chain Stay Length (cm)	43.5	43.5	43.5	43.5
K Bottom Bracket Drop (cm)	5.3	5.3	5.3	5.3
L Bottom Bracket Height (cm)	2.8	2.8	2.8	2.8
M Fork Rake (cm)	2.2	2.2	2.2	2.2
N Trail (cm)	9.9	9.9	9.9	9.9
O Stack (cm)	58.9	61.8	66.0	68.8
P Reach (cm)	38.6	40.9	42.3	44.6




Treadwell

	SM	MD	LG
A Seat Tube Length (cm)	38.7	45.0	51.3
B Top Tube Horizontal (cm)	55.7	57.9	60.0
C Top Tube Actual (cm)	NA	NA	NA
D Head Tube Angle	70.5°	71.0°	71.0°
E Seat Tube Angle	71.0°	71.0°	71.0°
F Standover (cm)	66.5	70.9	74.7
G Head Tube Length (cm)	13.5	16.5	19.6
H Wheelbase (cm)	105.9	107.6	109.7
Front Center (cm)	60.1	61.8	63.9
J Chain Stay Length (cm)	46.0	46.0	46.0
K Bottom Bracket Drop (cm)	6.4	6.4	6.4
L Bottom Bracket Height (cm)	28.0	28.0	28.0
M Fork Rake (cm)	5.5	5.5	5.5
N Trail (cm)	6.3	6.0	6.0
O Stack (cm)	55.0	58.0	61.0
P Reach (cm)	36.8	37.9	39.0




Treadwell Remixte

	SM	LG
A Seat Tube Length (cm)	38.7	45.0
3 Top Tube Horizontal (cm)	55.7	57.9
C Top Tube Actual (cm)	NA	
Head Tube Angle	70.5°	71.0°
E Seat Tube Angle	71.0°	71.0°
= Standover (cm)	54.5	54.9
G Head Tube Length (cm)	13.5	16.5
H Wheelbase (cm)	105.9	107.6
Front Center (cm)	60.1	61.8
Chain Stay Length (cm)	46.5	46.5
Sottom Bracket Drop (cm)	6.4	6.4
Bottom Bracket Height (cm)	28.0	28.0
VI Fork Rake (cm)	5.5	5.5
N Trail (cm)	6.3	6.0
🗅 Stack (cm)	55.0	58.0
Reach (cm)	36.8	37.9




Quick

	SM	MD	LG	XL
A Seat Tube Length (cm)	40.0	45.0	50.0	55.0
B Top Tube Horizontal (cm)	55.7	57.3	58.8	60.3
C Top Tube Actual (cm)	N/A			
D Head Tube Angle	70.0°	70.0°	70.0°	70.0°
E Seat Tube Angle	73.0°	73.0°	73.0°	73.0°
F Standover (cm)	69.0	73.1	77.2	81.2
G Head Tube Length (cm)	13.4	16.0	18.5	21.1
H Wheelbase (cm)	105.3	107.0	108.6	110.3
Front Center (cm)	62.7	64.4	66.0	67.7
J Chain Stay Length (cm)	43.5	43.5	43.5	43.5
K Bottom Bracket Drop (cm)	6.8	6.8	6.8	6.8
L Bottom Bracket Height (cm)	27.7	27.7	27.7	27.7
M Fork Rake (cm)	5.5	5.5	5.5	5.5
N Trail (cm)	6.7	6.7	6.7	6.7
O Stack (cm)	55.4	57.8	60.2	62.6
P Reach (cm)	38.8	39.6	40.4	41.2




Quick Women's

	SM	MD	TL
A Seat Tube Length (cm)	35.0	40.0	45.0
B Top Tube Horizontal (cm)	54.2	55.7	57.3
C Top Tube Actual (cm)	N/A	N/A	N/A
D Head Tube Angle	70.0°	73.0°	73.0°
E Seat Tube Angle	73.0°	73.0°	73.0°
F Standover (cm)	64.8	69.0	73.1
G Head Tube Length (cm)	10.9	13.4	16.0
H Wheelbase (cm)	103.6	105.3	107.0
Front Center (cm)	61.0	62.7	64.4
J Chain Stay Length (cm)	43.5	43.5	43.5
K Bottom Bracket Drop (cm)	6.8	6.8	6.8
∟ Bottom Bracket Height (cm)	27.7	27.7	27.7
M Fork Rake (cm)	5.5	5.5	5.5
N Trail (cm)	6.7	6.7	6.7
O Stack (cm)	53.0	55.4	57.8
P Reach (cm)	38.0	38.8	39.6



Quick Women's 6 (Stepthru)

	SM	MD	TL
A Seat Tube Length (cm)	35.0	40.0	45.0
B Top Tube Horizontal (cm)	54.2	55.7	57.3
C Top Tube Actual (cm)	N/A	*	*
D Head Tube Angle	70.0°	*	*
E Seat Tube Angle	73.0°	*	*
F Standover (cm)	60.7	61.3	61.9
G Head Tube Length (cm)	10.9	13.4	16.0
H Wheelbase (cm)	103.6	105.3	107.0
Front Center (cm)	61.0	62.7	64.4
J Chain Stay Length (cm)	43.5	*	*
K Bottom Bracket Drop (cm)	6.8	*	*
∟ Bottom Bracket Height (cm)	27.7	*	*
M Fork Rake (cm)	5.5	*	*
N Trail (cm)	6.7	*	*
O Stack (cm)	53.0	55.4	57.8
P Reach (cm)	38.0	38.8	39.6





E-Bike

ROAD MOUNTAIN URBAN



E-Bike Line-Up

Road



Mountain



HABIT NEO

Urban



MOTERRA

TESORO NEO X

Synapse NEO



Category E-Bike | E-Road

Sizes S, M, L, XL **Wheel / Tire Size** 700 × 32c

The Open Road

The hill-leveling power, all-day range and a comfortable, confident rider position of this all-new electric road bike makes the beauty of road riding open to all.

Key Benefits

PURE POWER

The Bosch Generation 3 Active Line Plus is the perfect drive unit for e-road. It's silent, powerful light, and has virtually no drag when the motor cuts out.

NO RANGE ANXIETY

The big 500Wh PowerTube battery integrates cleanly into the downtube and packs enough energy for even the longest days. Go as long as you want -the Syanpse NEO will get you home.

REAL ROAD GEARING

Synapse NEO is the only Bosch equipped road bike compatible with a double chainring crank, so you can always find the right gear to make the most of the power you have.

CONFIDENT HANDLING

OutFront Geometry delivers high-speed stability with a quick, nimble road-bike feel. And as a bonus, it reduces the chance of toe overlap with the front wheel on smaller sizes.

ALL-DAY COMFORT

A classic endurance rider position, road-smoothing 700×32c tires and Cannondale's SAVE Micro-Suspension keep you comfortably in control on even the longest, roughest days.





Synapse NEO 1 RRP \$6799

				67100M
Frame	SmartForm C1 Alloy, removable downtube battery,	Chain	Shimano HG601, 11-speed	
	SAVE, Ai, internal cable routing, flat mount brake, 142×12	Rear Cogs	Shimano 105, 11-34, 11-speed	
thru	thru-axle, Si kickstand mount, rack/fender mounts	Front Derailleur	Shimano 105, braze-on	
Fork	BallisTec Carbon, 1-1/8" to 1.5" tapered steerer,	Rear Derailleur	Shimano Ultegra GS	
55mm offset, flat mount brake, 12×100 thru axle,		Shifters	Shimano Ultegra hydro disc, 2×11	
B () () ()	fender mounts, hidden cable routing	Handlebar	Cannondale 3, 6061 alloy, Compact	
Drive Unit	Bosch Active Line Plus 250W	Grips	Cannondale Grip Bar Tape w/Gel, 3.5mm	
Battery	Bosch PowerTube 500Wh	Stem	Cannondale 3, 6061 alloy, 7-degree	
Display	Bosch Purion	Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings	
Charger	Bosch 4a	Brakes	Shimano 105 hydro disc, 160/160mm RT70 rotors	
Rims	RD 2.0, 28h	Brake Levers	Shimano Ultegra hydro disc	
Hubs	(F) Formula CL-712 / (R) RXC-142S			
Spokes	DT Swiss Champion	Saddle	Fabric Scoop Shallow Sport, steel rails	
Tires	WTB Exposure TCS, 700 × 32c, Distance+	Seatpost	Cannondale 2, UD Carbon, 25.4, 350mm (S-M), 400mm (L-XL))
Theo	compound, tubeless ready	Connectivity	Wheel Sensor	
Pedals	Not Included	Sizes	S, M, L, XL	
Crank	Bosch Gen3 w/ custom Ai offset & FSA rings, 50/34	Color 1	Black (BLK)	

Moterra



Category E-Bike | E-Mountain

Sizes S, M, L, XL Wheel / Tire Size 27.5×2.6" (S) 29×2.6" (M, L, XL) Travel

160mm (F/R)

Boundless

An e-mountain bike with infinite capability. The shackles are off, go ride the unrideable. Again and again.

Key Benefits

D IT RAILS

Impressively precise. Uncommonly agile. With its low center of gravity, modern geometry and short chainstays, Moterra's handling is in a class of its own.

ONE SIZE DOESN'T FIT ALL

Riders come in all sizes. Proportional Response is the only design that addresses this fact, tailoring the suspension layout by size so that every rider gets optimal traction, suppleness and control.

POWER & STYLE

Bosch's powerful Performance CX drive unit and a longlasting PowerTube battery integrate cleanly into Moterra's burly carbon frame. The power and range to ride anything — in a beautiful package.



Moterra 1


RRP \$10999

Frame	160mm travel, BallisTec Carbon Front Triangle, SmartForm C1 Alloy Swingarm, Proportional Response Tuned Suspension, removable downtube battery, alloy skid plate, Ai offset drivetrain, internal cable routing, 148×12mm thru-axle, post mount brake, tapered headtube
Fork	Fox Float Factory 36, 160mm, FIT Grip2 Damper, 15×110, tapered steerer, 51mm offset
Rear Shock	Fox Float Factory DPX2 EVOL, 3-Pos adj.
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube
Display	Bosch Purion
Charger	Bosch 4a
Rims	Stan's NoTubes Flow MK3, 32h, tubeless ready
Hubs	(F) Formula 15×110 (R) SRAM 746, 12×148
Spokes	DT Swiss Champion
Tires	(F) (F) Maxxis Minion DHF, 27.5/29 × 2.6", 3C compound, EXO+, tubeless ready (R) (R) Maxxis Minion DHR II, 27.5/29 × 2.6", 3C compound, EXO+, tubeless ready

		C65100M
Crank	Bosch Gen4 w/ custom Ai offset, 34T	
Chain	SRAM NX Eagle, 12-speed	
Rear Cogs	SRAM PG-1230, NX Eagle, 11-50, 12-speed	
Rear Derailleur	SRAM X01 Eagle	
Shifters	SRAM GX Eagle, 12-speed	
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm	
Grips	Fabric Funguy Locking Grips	
Stem	Cannondale 1, 3D Forged 6061 Alloy, 1-1/8", 31.8, 7°	
Headset	Integrated Sealed Bearing, Tapered	
Brakes	Magura MT7 4-piston hydro disc, 220/203mm Spider rotor	s
Brake Levers	Magura MT7 Trail HC hydro disc	
Saddle	Fabric Scoop Shallow Elite, cro-mo rails	
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 100mm (S), 125mm (M), 150mm (L/XL)	
Sizes	S, M, L, XL	
Color 1	Mantis (MAT)	
Extras	Lights - Supernova M99 Mini Pro	

Moterra 2

rrp \$8999

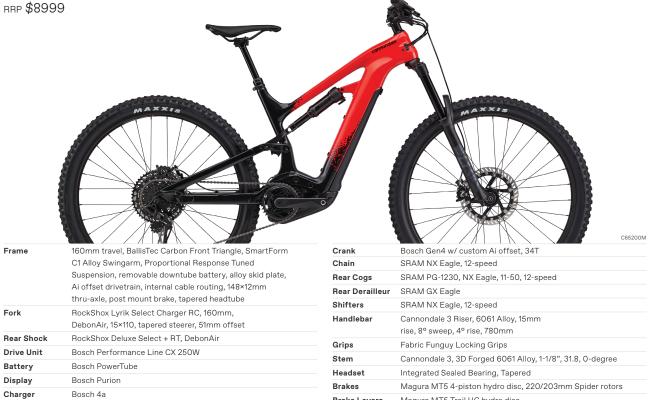

WTB ST i29 TCS, 32h, tubeless ready Rims Hubs (F) Formula 15×110 (R) SRAM 746, 12×148 Spokes DT Swiss Champion (F) (F) Maxxis Minion DHF, 27.5/29 × 2.6", 3C compound, Tires EXO+, tubeless ready (R) (R) Maxxis Minion DHR II, 27.5/29 × 2.6", 3C compound, EXO+, tubeless ready

Rear Cogs	SRAM PG-1230, NX Eagle, 11-50, 12-speed
Rear Derailleur	SRAM GX Eagle
Shifters	SRAM NX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy Locking Grips
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0-degree
Headset	Integrated Sealed Bearing, Tapered
Brakes	Magura MT5 4-piston hydro disc, 220/203mm Spider rotors
Brake Levers	Magura MT5 Trail HC hydro disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 100mm (S), 125mm (M), 150mm (L/XL)
Sizes	S, M, L, XL
Color 1	Acid Red (ARD)

cannondale

Moterra 3

rrp **\$7499**

			C65300M
Frame	160mm travel, BallisTec Carbon Front Triangle, SmartForm	Chain	SRAM SX Eagle, 12-speed
	C1 Alloy Swingarm, Proportional Response Tuned	Rear Cogs	SRAM PG-1210, SX Eagle, 11-50, 12-speed
	Suspension, removable downtube battery, alloy skid plate,	Rear Derailleur	SRAM SX Eagle
	Ai offset drivetrain, internal cable routing, 148×12mm	Shifters	SRAM SX Eagle, 12-speed
	thru-axle, post mount brake, tapered headtube	Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm
Fork	RockShox 35 Gold RL, 160mm, DebonAir,		rise, 8° sweep, 4° rise, 780mm
	15×110, tapered steerer, 51mm offset	Grips	Cannondale Locking Grips
Rear Shock	RockShox Deluxe Select R, DebonAir	Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 0-degree
Drive Unit	Bosch Performance Line CX 250W	Headset	Integrated Sealed Bearing, Tapered
Battery	Bosch PowerTube 500Wh	Brakes	SRAM Guide RE hydro disc, 4-piston,
Display	Bosch Purion	Funtoo	220/200mm Centerline rotors
Charger	Bosch 4a	Brake Levers	SRAM Guide RE hydro disc
Rims	WTB ST i29 TCS, 32h, tubeless ready	Saddle	Fabric Scoop Shallow Sport, steel rails
Hubs	(F) Formula 15×110 (R) Formula DC-1248, 12×148	Seatpost	TranzX dropper, internal routing, 31.6, 80mm (XS),
Spokes	DT Swiss Champion	ocurpost	100mm (S), 120mm (M), 130mm (L-XL)
Tires	(F) (F) Maxxis Minion DHF, 27.5/29 × 2.6", 3C compound,	Sizes	S, M, L, XL
	EXO+, tubeless ready (R) (R) Maxxis Minion DHR II,	Color 1	BBQ (BBQ)
	27.5/29 × 2.6", 3C compound, EXO+, tubeless ready		
Crank	Bosch Gen4 w/ custom Ai offset, 34T		

ELECTRIC | MOUNTAIN

Habit NEO



Category E-Bike | E-Mountain

Sizes S, M, L, XL Wheel / Tire Size 29" x2.25" **Travel** (F) 140mm (R) 130mm

Second Nature

An E-mountain bike with its priorities straight: progressive design, playful agility and killer capability – all in the name of fun.

Key Benefits

Flow Seeker

The head angle is slack, the stays are short and the seat angle is steep. The drive unit and battery sit low and central in the frame. All to help you wring more flow from every inch of trail.

One Size Doesn't Fit All

Riders come in all sizes. Proportional Response is the only design that addresses this fact, tailoring the suspension layout by size so that every rider gets optimal traction, suppleness and control.

The Right Stuff

Powerful Bosch Performance CX drive unit and PowerTube battery. 29" wheels with grippy tires. Properly wide bars and properly short stems. Dropper posts. Big brakes. Real parts for real performance.





Habit Neo 2

rrp **\$8499**

1	
Frame	130mm travel, BallisTec Carbon Front Triangle, SmartForm C1 Alloy Swingarm, Proportional Response Tuned Suspension, removeable downtube battery, alloy skid plate, Ai offset drivetrain, internal cable routing, 148×12mm thru-axle, post mount brake, tapered headtube
Fork	RockShox 35 Gold RL, 140mm, DebonAir, 15×110, tapered steerer, 51mm offset
Rear Shock	RockShox Deluxe Select+ RT, DebonAir
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube
Display	Bosch Purion
Charger	Bosch 4a
Rims	Stan's NoTubes Flow S1, 32h, tubeless ready
Hubs	(F) Formula DC-511, 15×100 (R) SRAM 746, 12×148
Spokes	DT Swiss Champion
Tires	Maxxis Rekon, 29 × 2.6", 3C compound, EXO, tubeless ready
Pedals	Not Included
Crank	Bosch Gen4 w/ custom Ai offset, 34T

MAXXIS

		C65250M
Chain	SRAM NX Eagle, 12-speed	
Rear Cogs	SRAM PG-1230, NX Eagle, 11-50, 12-speed	
Rear Derailleur	SRAM GX Eagle	
Shifters	SRAM NX Eagle, 12-speed	
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm	
Grips	Cannondale Locking Grips	
Stem	Cannondale 1, 3D Forged 6061 Alloy, 1-1/8", 31.8, 7°	
Headset	Integrated Sealed Bearing, Tapered	
Brakes	Magura MT5 Trail hydro disc, (F) 4-piston / (R) 2-piston, 220/203mm Spider rotors	
Brake Levers	Magura MT5 Trail HC hydro disc	
Saddle	Fabric Scoop Shallow Elite, cro-mo rails	
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 100mm (S), 125mm (M), 150mm (L/XL)	
Sizes	S, M, L, XL	
Color 1	Mantis (MAT)	

MAXXIS

Tesoro NEO X



Category E-Bike | E-Urban

Sizes S, M, L, XL Wheel / Tire Size 29" ×2.25"

Travel 100mm (F)

Go Wild

This on-road/off-road e-bike is a fully loaded trekking machine. Get out of the rat-race and into the wilderness.

Key Benefits

Off-Road Ready

Tesoro NEO X lives to be pointed off pavement. For bikepacking, backroad trekking or rugged transport, its MTB-inspired frame & fork and big 29" wheels let you get in deeper and go further.

Loaded for Adventure

Secure, rattle-free fenders and a full rear rack, bright front and rear lights, and even a kickstand mean you're ready to tackle any adventure.

Comfortably in Control

Potholes? Gravel? Tram tracks? No worries. All the features that make Tesoro NEO X so capable off-road translate into a supremely comfortable, confident experience on-road.





Tesoro Neo X 3

rrp **\$**5299


Frame	SmartForm C2 Alloy, removable downtube battery, SAVE,	Rear Derailleur	Shima
	tapered headtube, internal cable routing, 148×12mm	Shifters	Shima
	thru-axle, post mount disc, Si kickstand mount	Handlebar	Canno
Fork	SR Suntour XCM, 100mm, Coil, 46mm offset		rise, 8
Drive Unit	Bosch Active Line Plus 250W	Grips	Canno
Battery	Bosch PowerTube 500Wh	Stem	Canno
Display	Bosch Purion	Headset	Integra
Charger	Bosch 4a	Brakes	Shima
Rims	WTB STX i29 TCS, 32h, tubeless ready	Brake Levers	Shima
Hubs	(F) Shimano QR / (R) Shimano MT400 12×148	Saddle	Canno
Spokes	DT Swiss Champion	Seatpost	Canno
Tires	Schwalbe G-One Allround Performance, 29	Connectivity	Wheel
	x 2.25", RaceGuard, tubeless ready	Sizes	S, M, L
Pedals	Cannondale Platform	Color 1	Black I
Crank	Bosch Gen3, 38T	Extras	Lights
Chain	Shimano HG93, 9-speed		Tubus
Rear Cogs	Shimano, 11-36, 9-speed		

	C66300M
Rear Derailleur	Shimano Alivio
Shifters	Shimano Acera, 9-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 740mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Adjustable , A-headset, 31.8mm
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydro disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydro disc
Saddle	Cannondale Ergo Touring
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Connectivity	Wheel Sensor
Sizes	S, M, L, XL
Color 1	Black Pearl (BPL)
Extras	Lights - Herrmans H-Black MR4 front, H-Trace Mirco rear, Tubus Wingee Fender, Tubus rear rack (25kg max capacity)

ELECTRIC | MOUNTAIN


Moterra NEO

	SM	MD	LG	XL
A Seat Tube Length (cm)	41.0	44.0	47.0	51.5
B Top Tube Horizontal (cm)	58.7	61.4	63.8	66.6
C Top Tube Actual (cm)	52.2	55.2	57.8	61.2
D Head Tube Angle	66.0°	66.0°	66.0°	66.0°
E Seat Tube Angle				
E ¹ Seat Tube Angle Effective	75.0°	75.0°	75.0°	75.0°
F Standover (cm)	73.9	74.9	75.5	77.8
G Head Tube Length (cm)	10.0	11.0	12.0	13.0
H Wheelbase (cm)	118.4	122.1	124.7	127.6
Front Center (cm)	73.5	77.2	79.7	82.7
J Chain Stay Length (cm)	45.0	45.0	45.0	45.0
K Bottom Bracket Drop (cm)	1.0	1.8	1.8	1.8
L Bottom Bracket Height (cm)	35.1	36.2	36.2	36.2
M Fork Rake (cm)	4.4	5.1	5.1	5.1
N Trail (cm)	11.3	11.3	11.3	11.3
O Stack (cm)	58.5	61.9	62.9	63.8
P Reach (cm)	43.0	44.8	47.0	49.5




Habit NEO

	SM	MD	LG	XL
A Seat Tube Length (cm)	40.0	43.0	46.0	51.0
B Top Tube Horizontal (cm)	58.7	61.0	63.7	66.5
C Top Tube Actual (cm)	53.6	55.6	58.2	61.2
D Head Tube Angle	66.5°	66.5°	66.5°	66.5°
E Seat Tube Angle				
E ¹ Seat Tube Angle Effective	75.0°	75.0°	75.0°	75.0°
F Standover (cm)	53.6	55.6	58.2	61.2
G Head Tube Length (cm)	10.0	11.0	12.0	13.0
H Wheelbase (cm)	118.1	120.5	123.4	126.3
Front Center (cm)	72.8	75.2	78.1	81.0
J Chain Stay Length (cm)	45.5	45.5	45.5	45.5
K Bottom Bracket Drop (cm)	3.8	3.8	3.8	3.8
L Bottom Bracket Height (cm)	34.2	34.2	34.2	34.2
M Fork Rake (cm)	5.1	5.1	5.1	5.1
N Trail (cm)	10.9	10.9	10.9	10.9
O Stack (cm)	60.5	61.4	62.3	63.3
P Reach (cm)	42.5	44.5	47.0	49.5




Synapse NEO

	SM	MD	LG	XL
A Seat Tube Length (cm)	44.5	49.0	53.5	58.0
B Top Tube Horizontal (cm)	53.5	55.2	57.6	59.7
C Head Tube Angle	71°	71°	71°	71°
D Seat Tube Angle	74°	74°	73.5°	73°
E Standover (cm)	73	77	81	85
G Head Tube Length (cm)	12.6	15.7	19.1	22.2
G Wheelbase (cm)	103.4	105.3	107.3	103.4
H Front Center (cm)	60.5	62.4	64.4	66.6
Chain Stay Length (cm)	43.8	43.8	43.8	43.8
J Bottom Bracket Drop (cm)	6.7	6.7	6.7	6.7
K Bottom Bracket Height (cm)	28.2	28.2	28.2	28.2
∟ Fork Rake (cm)	5.5	5.5	5.5	5.5
M Trail (cm)	6.2	6.2	6.2	6.2
N Stack (cm)	54.7	57.7	60.9	63.8
O Reach (cm)	37.8	38.7	39.6	40.8



Tesoro NEO X

	SM	MD	LG	XL
A Seat Tube Length (cm)	38	43.5	48.5	53.5
B Top Tube Horizontal (cm)	58	61.7	64.0	66.5
C Top Tube Actual (cm)	N/A	N/A	N/A	N/A
D Head Tube Angle	68°	68°	68°	68°
E Seat Tube Angle				
E ¹ Seat Tube Angle Effective	73.5°	73.5°	73.5°	73.5°
F Standover (cm)	74.6	77.5	81.3	84.7
G Head Tube Length (cm)	12.8	12.8	13.6	14.4
H Wheelbase (cm)	115.5	119.2	121.6	124.2
Front Center (cm)	68.2	71.9	81.3	84.7
J Chain Stay Length (cm)	47.9	47.9	47.9	47.9
K Bottom Bracket Drop (cm)	5.7	5.7	5.7	5.7
L Bottom Bracket Height (cm)	31.5	31.5	31.5	31.5
M Fork Rake (cm)	5.1	5.1	5.1	5.1
N Trail (cm)	9.2	9.2	9.2	9.2
O Stack (cm)	62.9	62.9	63.7	64.4
P Reach (cm)	39.3	43.0	45.1	47.4





Kids

Kids' Line-Up

Cujo

With their agile feel and the grip and comfort of their big plus-size tires, the Cujos are the best way to learn trail-riding skills with fewer spills.



Trail

With their lightweight alloy frames, smooth suspension forks and easy gearing, the Trail bikes are ready for off-road adventure.



Quick

Fast rolling tires, wide range gearing and confident, stable handling make these seriously high-performance, on-road/off-road street machines.



Trail Single Speed / Freewheel

With one-speed simplicity and easy-to-use brakes, these lightweight bikes are perfect for building skills and having fun.



Trail Balance

Why not start 'em off in style? With its lightweight alloy frame and cool singlesided fork, this skill-building machine is unmistakably Cannondale.



Kids C RRP \$1099	ujo Race 24+	Contraction of the local division of the loc	
Frame	SmartForm C3 Alloy, smooth welding	Rear Derailleur	Shimano Deore GS
Fork	SmartForm C3 Alloy, 1-1/8" steerer, IS disc mount	Shifters	Shimano Deore, 10-speed
Rims	Cannondale Disc, lightweight alloy, double	Handlebar	Lightweight Alloy Riser, 31.8, 635mm
	wall, 24", 29mm inner width, 28h	Grips	Cannondale Kid's Performance
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR	Stem	Cannondale, 6061 Alloy, 31.8, 7°
Spokes	Stainless Steel 14g	Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Tires	Kenda Slant 6, 24 × 2.6"	Brakes	Promax DSK-926 hydro disc, 160/160mm rotors
Pedals	Wellgo Composite Platform w/ reflectors	Brake Levers	Promax hydro disc, short reach
Crank	Prowheel, Pro-V30, 130mm length, 30T	Saddle	Cannondale Ergo
Bottom Bracket	Cartridge square taper	Seatpost	Lightweight alloy, 25.4mm
Chain	KMC X10, 10-speed	Sizes	One Size
Rear Cogs	Sunrace, 11-42, 10-speed	Color 1	Chameleon (CML)

Kids Cujo 24+

- --.



Sizes

Color 1

One Size

Electric Blue (ELB)

KMC Z8.1, 8-speed

Sunrace, 11-34, 8-speed

Chain

Rear Cogs

Kids C RRP \$1099	ujo Race 20+	Composition of the	
Frame	SmartForm C3 Alloy, smooth welding	Rear Derailleur	SRAM X5
Fork	SmartForm C3 Alloy, 1-1/8" steerer, IS disc mount	Shifters	SRAM X5, 10-speed
Rims	Cannondale Disc, lightweight alloy, double	Handlebar	Lightweight Alloy Riser, 31.8, 635mm
	wall, 20", 29mm inner width, 28h	Grips	Cannondale Kid's Performance
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR	Stem	6061 Alloy, 31.8, 7°
Spokes	Stainless Steel 14g	Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Tires	Kenda Slant 6, 20 × 2.6"	Brakes	Promax hydro disc, 160/160mm rotors
Pedals	Wellgo Composite Platform w/ reflectors	Brake Levers	Promax hydro disc, short reach
Crank	Prowheel, Pro-V30, 110mm length, 30T	Saddle	Cannondale Ergo
Bottom Bracket	Cartridge square taper	Seatpost	Lightweight alloy, 25.4mm
Chain	KMC X10, 10-speed	Sizes	One Size
Rear Cogs	Sunrace, 11-42, 10-speed	Color 1	Acid Red (ARD)

Kids Cujo 20+



Color 1


Crush (CRU)

Rear Cogs Sunrace, 11-34, 7-speed

KIDS

Kids T RRP \$649	rail 24"	Solution of the second	
Frame	SmartForm C3 Alloy, smooth welding	Shifters	Shimano Tourney Revo Twist Shifter, 8-speed
Fork	SunTour XCT-JR 24, 63mm travel, 1-1/8"	Handlebar	Lightweight Alloy, 580mm wide, 25.4mm
FORK	steerer, coil, w/ disc mounts		
Rims	Cannondale lightweight alloy, 24", 28h	Grips Stem	Cannondale Kid's Performance Alloy Ahead, 30mm
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR	Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Spokes	Steel, 14g Black	Brakes	Cable actuated mechanical disc
Tires	Kenda Small Block 8, 24 × 1.95"	Brake Levers	Alloy 3 finger
Pedals	Wellgo Composite Platform w/ reflectors	Saddle	Cannondale Ergo
Crank	Prowheel, Pro-V30, 130mm length, 30T	Seatpost	Lightweight alloy, 25.4mm
	Cartridge square taper	Sizes	One Size
Chain	KMC Z8.1, 8-speed	Color 1	Midnight (MDN)
Rear Cogs	Sunrace, 12-32, 8-speed	Extras	Kickstand
Rear Derailleur	Shimano Tourney TX	Extras	Nokotano

Kids Trail 24"

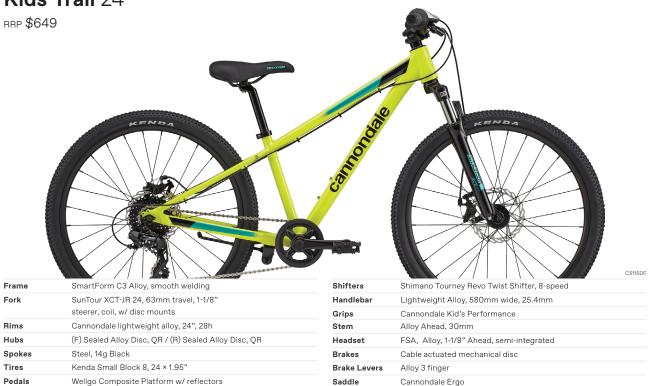

Saddle

Sizes

Color 1

Extras

Seatpost

Cannondale Ergo

One Size

Kickstand

Lightweight alloy, 25.4mm

Nuclear Yellow (NYW)

Bottom Bracket Cartridge square taper

Rear Derailleur Shimano Tourney TX

KMC Z8.1, 8-speed

Sunrace, 12-32, 8-speed

Prowheel, Pro-V30, 130mm length, 30T

Crank

Chain

Rear Cogs

Kids T RRP \$529	rail 20"	Soundary and the second	<image/>
Frame	SmartForm C3 Alloy, smooth welding	Rear Derailleur	Shimano Tourney
Fork	SunTour XCT-JR 20, 40mm travel, 1-1/8"	Shifters	Shimano Tourney Revo Twist Shifter, 7-speed
	steerer, coil, w/ canti mounts	Handlebar	Lightweight Alloy, 580mm wide, 25.4mm
Rims	Cannondale lightweight alloy, 20", 28h	Grips	Cannondale Kid's Performance
Hubs	(F) KT Alloy, nutted axle / (R) KT Alloy,	Stem	Alloy Ahead, 30mm
	nutted axle, 7-speed freewheel	Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Spokes	Steel, 14g Black	Brakes	Promax V-Brake, alloy linear pull
Tires	Innova 20 × 1.95", multi-use tread	Brake Levers	Promax Alloy, linear pull
Pedals	Wellgo Composite Platform w/ reflectors	Saddle	Cannondale Ergo
Crank	Prowheel, Pro-V30, 110mm length, 30T	Seatpost	Lightweight alloy, 25.4mm
Bottom Bracket	Cartridge square taper	Sizes	One Size
Chain	KMC Z7, 7-speed	Color 1	Emerald (EMR)
Rear Cogs	Shimano, 14-28, 7-speed FW	Extras	Kickstand

Kids Trail 20"



Seatpost

Sizes

Color 1

Extras

Lightweight alloy, 25.4mm

One Size

Crush (CRU)

Kickstand

KMC Z7, 7-speed Chain Rear Cogs Shimano, 14-28, 7-speed FW

Bottom Bracket Cartridge square taper

Prowheel, Pro-V30, 110mm length, 30T

Crank

\sim
н
D
S

Kids Q RRP \$599	Puick 24"	Congonad	
Frame	SmartForm C3 Alloy, smooth welding	Shifters	Shimano Tourney Revo Twist Shifter, 7-speed
Fork	Rigid, SmartForm C3 Alloy, 1-1/8" steerer	Handlebar	Lightweight Alloy, 580mm wide, 25.4mm
Rims	Cannondale lightweight alloy, 24", 28h	Grips	Cannondale Kid's Performance
Hubs	(F) KT Alloy, nutted axle / (R) KT Alloy, 7-speed freehub	Stem	Alloy Ahead, 30mm
Spokes	Steel, 14g Black	Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Tires	Kenda, Small Block 8, 24 × 1.5"	Brakes	Promax V-Brake, alloy linear pull
Pedals	Wellgo Composite Platform w/ reflectors	Brake Levers	Promax
Crank	Prowheel, Pro-V30, 145mm length, 30T	Saddle	Cannondale Ergo
Bottom Bracket	Cartridge square taper	Seatpost	Lightweight alloy, 25.4mm
Chain	KMC Z7, 7-speed	Sizes	One Size
Rear Cogs	Sunrace, 11-28, 7-speed	Color 1	Acid Red (ARD)
Rear Derailleur	Shimano Tourney		

Kids Quick 24"



Color 1

Sherpa (SRP)


Rear Derailleur Shimano Tourney

Sunrace, 11-28, 7-speed

Rear Cogs

Kids Q	uick 20"	comordo	
Frame	SmartForm C3 Alloy, smooth welding	Rear Derailleur	Shimano Tourney
Fork	Rigid, SmartForm C3 Alloy, 1" steerer	Shifters	Shimano Tourney Revo Twist Shifter, 7-speed
Rims	Cannondale lightweight alloy, 20", 28h	Handlebar	Lightweight Alloy, 580mm wide, 25.4mm
Hubs	(F) KT Alloy, nutted axle / (R) KT Alloy, 7-speed freehub	Grips	Cannondale Kid's Performance
Spokes	Steel, 14g Black	Stem	Alloy Ahead, 30mm
Tires	Kenda Small Block 8, 20 × 1.5"	Headset	VP, Alloy, 1" Ahead, semi-integrated
Pedals	Wellgo Composite Platform w/ reflectors	Brakes	Promax V-Brake, alloy linear pull
Crank	Prowheel, Pro-V30, 110mm length, 30T	Brake Levers	Promax
Bottom Bracket	Cartridge square taper	Saddle	Cannondale Ergo
Chain	KMC Z7, 7-speed	Seatpost	Lightweight alloy, 25.4mm
Rear Cogs	Sunrace, 11-28, 7-speed	Sizes	One Size
		Color 1	Electric Blue (ELB)

Kids Quick 20"

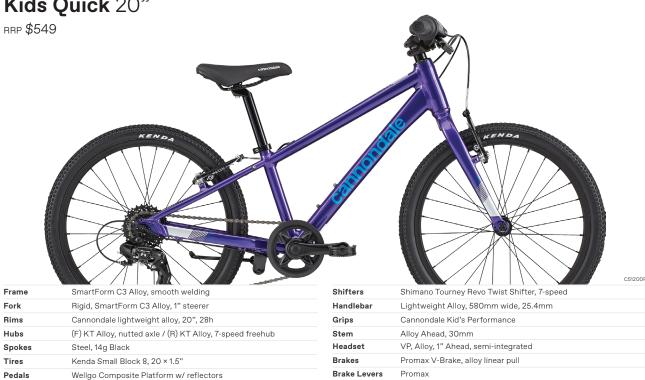

Bottom Bracket Cartridge square taper Chain KMC Z7, 7-speed Rear Cogs Sunrace, 11-28, 7-speed

Prowheel, Pro-V30, 110mm length, 30T

Rear Derailleur Shimano Tourney

Crank

Brake Levers Promax Saddle Cannondale Ergo Seatpost Lightweight alloy, 25.4mm Sizes One Size Ultra Violet (ULV) Color 1

Kids Trail Single-Speed 20"

rrp \$399



Kids Trail Single-Speed 20"

rrp \$399



Frame	SmartForm C3 Alloy, smooth welding
Fork	Rigid, steel, 1" steerer
Rims	Cannondale lightweight alloy, 20", 28h
Hubs	(F) Alloy, nutted axle / (R) Alloy, nutted axles, coaster brake
Spokes	Steel, 14g Black
Tires	20 × 2.0", multi-use tread
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	One-piece, 120mm length, 32T
Bottom Bracket	Included
Chain	KMC S1, 1/2×1/8"
Rear Cogs	16T

		C51270F
Handlebar	Lightweight Alloy, 560mm wide, 22.2mm	
Grips	Cannondale Kid's Comfort	
Stem	Alloy Ahead, 37mm	
Headset	1" Ahead	
Brakes	Rear V-brake and rear coaster brake	
Brake Levers	Alloy, linear pull	
Saddle	Cannondale Kid's Comfort	
Seatpost	One-piece, clamp-less, 25.4mm	
Sizes	One Size	
Color 1	Turqoise (TRQ)	
Extras	Kickstand, Chainguard	

Kids T RRP \$379	rail Single-Speed 16"	comorade	
Frame	SmartForm C3 Alloy, smooth welding	Handlebar	Lightweight Alloy, 500mm wide, 22.2mm
Fork	Rigid, steel, 1" steerer	Grips	Cannondale Kid's Comfort
Rims	Cannondale 4, lightweight alloy, 16", 28h	Stem	Alloy Ahead, 37mm
Hubs	(F) Alloy, nutted axle / (R) Alloy, nutted axles, coaster brake	Headset	1" Ahead
Spokes	Steel, 14g Black	Brakes	Rear coaster brake
Tires	Innova, 16 × 1.95", multi-use tread	Brake Levers	Alloy, linear pull
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"	Saddle	Cannondale Kid's Comfort
Crank	One-piece, 110mm length, 28T	Seatpost	One-piece, clamp-less, 25.4mm
Bottom Bracket	Included	Sizes	One Size
Chain	KMC S1, 1/2×1/8"	Color 1	Acid Red (ARD)
Rear Cogs	16T	Extras	Tool-less training wheels, Chainguard

Kids Trail Single-Speed 16"

rrp \$379



Frame	SmartForm C3 Alloy, smooth welding
Fork	Rigid, steel, 1" steerer
Rims	Cannondale 4, lightweight alloy, 16", 28h
Hubs	(F) Alloy, nutted axle / (R) Alloy, nutted axles, coaster brake
Spokes	Steel, 14g Black
Tires	Innova, 16 × 1.95", multi-use tread
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	One-piece, 110mm length, 28T
Bottom Bracket	Included
Chain	KMC S1, 1/2×1/8"
Rear Cogs	16T

		C51360F
Handlebar	Lightweight Alloy, 500mm wide, 22.2mm	
Grips	Cannondale Kid's Comfort	
Stem	Alloy Ahead, 37mm	
Headset	1" Ahead	
Brakes	Rear coaster brake	
Saddle	Cannondale Kid's Comfort	
Seatpost	One-piece, clamp-less, 25.4mm	
Sizes	One Size	
Color 1	Flamingo (FLM)	
Extras	Tool-less training wheels, Chainguard	




Kids RRP \$299	Trail Balance	camorde	
Frame	SmartForm C3 Alloy, smooth welding	Grips	Cannondale Kid's Comfort
Fork	Cannondale Little Lefty 12, rigid, SmartForm	Stem	Alloy Ahead, 37mm
	C2 Alloy, 11-8" steerer	Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Rims	Cannondale, lightweight alloy, 12", 16h	Saddle	Cannondale Kid's Comfort
Hubs	(F) Little Lefty single-sided / (R) Alloy, nutted axle	Seatpost	One-piece, clamp-less, 25.4mm
Spokes	Steel, 14g Black	Sizes	One Size
Tires	Innova, 12 × 1.75", multi-use tread	Color 1	Acid Red (ARD)
Handlebar	Lightweight Alloy, 460mm wide, 22.2mm		

Kids Trail Balance

. . . .

....

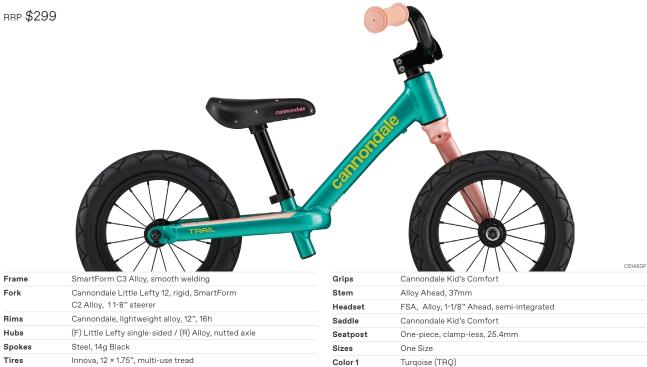

Handlebar Lightweight Alloy, 460mm wide, 22.2mm





BARS | STEMS SEATPOSTS SUSPENSION | WHEELS CRANKS | CHAINRINGS



HollowGram KNØT SystemBar

Provides the low drag and sleek look of a onepiece system, with the fit and interchangeability benefits of a two-piece bar and stem. 8 degrees of pitch adjustment. Narrow bar width with flared drops brings your arms closer together when on the hoods for lower drag.

- Look and speed of a 1-piece system
- Adjustability of a 2-piece system 6 watts faster than traditional cockpits when paired with SAVE Stem

Width	Code
38cm	CP2650U1038
40cm	CP2650U1040
42cm	CP2650U1042
44cm	CP2650U1044



Intellimount Adhesive Mount and Hardware

- Includes adhesive mount, Intellimount adapter, microrail adhesive mount and stand tool
- Manufactured by and compatible with SP Connect products

Color	Code
Black	CP1300U10OS



HollowGram Save Stem -6 Deg

- 1-piece look and speed w/ 2-piece adjustability
- External cable routing is compatible with any frame
- B0-130mm lengths available

Width Code

80mm	CP2000U1080	
90mm	CP2000U1090	
100mm	CP2000U1010	
110mm	CP2000U1011	
120mm	CP2000U1012	
130mm	CP2000U1030	



HollowGram KNØT Stem -6 Deg

Provides the low drag and sleek look of a one-piece system, with the fit and interchangeability benefits of a two-piece bar and stem. 8 degrees of pitch adjustment.

- 1-piece look and speed w/ 2-piece adjustability
- Cable cover for SuperSix included
- B0-120mm lengths available

Width Code

80mm	CP2250U1080	
90mm	CP2250U1090	
100mm	CP2250U1010	
110mm	CP2250U1011	
120mm	CP2250U1012	



HollowGram KNØT Stem -17 Deg

Provides the low drag and sleek look of a one-piece system, with the fit and interchangeability benefits of a two-piece bar and stem. 8 degrees of pitch adjustment.

- 1-piece look and speed w/ 2-piece adjustability
- Cable covers for SystemSix and SuperSix included
- B0-120mm lengths available

Width	Code
80mm	CP2300U1080
90mm	CP2300U1090
100mm	CP2300U1010
110mm	CP2300U1011
120mm	CP2300U1012



DownLow Dropper Post

Our DownLow dropper post is an infinitely adjustable, easily serviceable, air/hydraulic unit with a sweet cable remote. It goes up. It goes down. You need one.

- Travel: 100mm, 125mm, 150mm
- Weight: 570g (150mm travel)
- Diameter: 31.6
- Ix DownLow remote included
- Internal routing
- 0 offset head

Code	Travel	Length
CP2309U1044	150mm	440mm
CP2209U1039	125mm	390mm
CP2109U1034	100mm	340mm

Cannondale Two Seatpost

- Minimal styling, Maximum Performance
- Lightweight Forged 2024 aluminum
- □ 31.8mm Clamp

SAVE Carbon Road Seatpost

 Easy adjust two bolt head for fine tuning ride position

Di2 compatible

CU42142538

CU42142542

Code

 Ultra-light continuous carbon fiber layup offers just enough compliance to take the edge off without sacrificing power transfer

• 25.4mm diameter only, weighs 270 grams

Size

25.4 X 300mm, 15mm offset

25.4 X 350mm, 15mm offset

I00mm length stem weighs 185 grams

Code	Size
CU42112530	25.4×300mm
CU42112535	25.4×350mm
CU42112540	25.4×400mm





Lefty Ocho

The Lefty Ocho is for the XC rider who believes in results. The incredibly smooth suspension action that results from the lowest friction of any fork structure out there.

The climb-crushing speed that results from having one of the lightest suspension forks in the world. The line-owning precision that results from having best-in-class overall stiffness, tuned for maximum control. And the confidence that results from knowing you're on the most advanced, ground-breaking, preconceived-notion-destroying, XC-race-winning fork ever created. They're the kind of results that result in...well...real results.



HG SL 64 KNØT Wheel

Conceived as the first component of the SystemSix design, our new HollowGram 64 KNOT wheels are one hell of an engineering feat all in themselves. Designed to eliminate the drag penalty normally associated with running bigger tires, the 64 KNOT manage to pack all the comfort, rolling resistance and grip benefits of larger volume tires into one of the absolute, bar none, fastest wheelsets on the planet. The disc-only design is significantly wider than other road wheels and that extra width both makes small tires bigger (a 23c tire measures a full 26mm on our wheel) and helps air flowing over the larger tire reattach cleanly to the rim, maximizing flow attachment and minimizing drag. And as a bonus, while they're optimized for 26mm (23c) tires, the 64 KNOT design exhibits minimal drag with even larger tires, giving over the option to go bigger without slowing down. It's pure speed without compromise. By combining cutting edge aerodynamic tech patented and licensed by HED with all of the benefits of big tires, the 64 KNOTs are one of the absolute fastest wheelsets in the world.

- Class leading aerodynamics
- 64mm deep, disc brake specific, full carbon rims
- Rim width: 21mm internal / 32mm external
- HollowGram by DT Swiss rear hub, DT 240 internals, Center Lock disc
- DT Swiss Aerolite spokes
- Tubeless compatible
- Shimano and SRAM XDR freehub body versions available

Spec	Size	Code
100×12 CL	700c	CP8000U1070
142×12 CL SH	700c	CP8100U1070
142×12 CL XDR	700c	CP8100U1070



HG SL 45 KNØT Wheel

Designed to eliminate the drag penalty normally associated with running bigger tires, the Hollowgram 45 Knot manage to pack all the comfort, rolling resistance and grip benefits of larger volume tires into one of the absolute, bar none, fastest all around wheelsets on the planet. The 45mm deep rim is the perfect depth for alps passes to hammering the flats. The disc-only design is significantly wider than other road wheels and that extra width both makes small tires bigger (a 23c tire measures a full 26mm on our wheel) and helps air flowing over the larger tire reattach cleanly to the rim, maximizing flow attachment and minimizing drag. And as a bonus, while they're optimized for 26mm (23c) tires, the Hollowgram 45 Knot design exhibits minimal drag with even larger tires, giving riders the option to go bigger without slowing down. It's speed for every road.

- Class leading aerodynamics
- 45mm deep, disc brake specific, full carbon rims
- Bim width: 21mm internal / 32mm external
- HollowGram by DT Swiss rear hub, DT 240 internals, Center Lock disc
- DT Swiss Aerolite spokes
- Tubeless compatible
- Shimano and SRAM XDR freehub body versions available

Spec	Size	Code
100×12 CL	700c	CP8150U1070
142×12 CL SH	700c	CP8200U1070
142×12 CL XDR	700c	CP8250U1070



HG SL 23 Wheel

These XC-focused full carbon wheels are both ultra light and super stout, great for racing or fast trail riding. The 23mm internal rim width strikes the right balance between the solid bead retention and tire profile of wider rims, and the lightweight rotational mass or narrower rims.

- Bim width: 23mm internal / 29mm external
- HollowGram by DT Swiss rear hub, DT 350 internals, 6 bolt disc
- DT Swiss Competition Race spokes
- Tubeless compatible

Size	Code
27.5	CP8300U1027
29	CP8300U1029
27.5	CP8350U1027
29	CP8350U1029
27.5	CP8400U1027
29	CP8400U1029
29	CP8450U1029
29	CP8500U1029
	27.5 29 27.5 29 27.5 29 27.5 29 29 29



Hollowgram[™] SiSL2 Road

The evolution of the revolution. 15 years ago, the original Cannondale HollowGram crank started the BB30 revolution and set a new standard for ultra-light, super-stiff cranks. The most current evolution of the HollowGram, the SiSL2, continues this tradition of radical innovation. These hollow cranks are created by bonding together two machined, heat-treated clamshell halves with a super-strong anaerobic bonding agent. Extensive FEA modelling and physical testing have allowed us to refine the internal and external shapes for the ultimate in stiffness-to-weight. The result is a crank light and stiff enough for our top road race machines but still so tough, we use it on our mountain bikes as well. Compatible with all Cannondale Si Spiders and SpideRings.

Code

CU40356503	Hollowgram Si SL2 165 52/36 SpideRing
CU40357003	Hollowgram Si SL2 170 52/36 SpideRing
CU40357203	Hollowgram Si SL2 172.5 52/36 SpideRing
CU40357503	Hollowgram Si SL2 175 52/36 SpideRing



Hollowgram[™] SiSL2 Mountain

The evolution of the revolution. 15 years ago, the original Cannondale HollowGram crank started the BB30 revolution and set a new standard for ultra-light, super-stiff cranks. The most current evolution of the HollowGram, the SiSL2, continues this tradition of radical innovation. These hollow cranks are created by bonding together two machined, heat-treated clamshell halves with a super-strong anaerobic bonding agent. Extensive FEA modelling and physical testing have allowed us to refine the internal and external shapes for the ultimate in stiffness-to-weight. The result is a crank light and stiff enough for our top road race machines but still so tough, we use it on our mountain bikes as well. Compatible with all Cannondale Si Spiders and SpideRings.

Code

CU40376532	Hollowgram Si SL2 165 32 SpideRing
CU40377032	Hollowgram Si SL2 170 32 SpideRing
CU40377532	Hollowgram Si SL2 175 32 SpideRing



Hollowgram[™] Si Road

Our patented OPI 3D forging process enables us to build hollow, seamless crankarms that are not only extremely light but also incredibly strong and stiff. In fact, they are the stiffest, strongest crankarms we've ever made. Lighter and stiffer than the competition and completely compatible with every HollowGram spider and chainring set-up, the HollowGram Si cranks bring top-level performance to more pricepoints.

Code

CU40366503	Hollowgram Si 165 52/36 8 Arm SpideRing
CU40367003	Hollowgram Si 170 52/36 8 Arm SpideRing
CU40367203	Hollowgram Si 172.5 52/36 8 Arm SpideRing
CU40367503	Hollowgram Si 175 52/36 8 Arm SpideRing



Hollowgram[™] Si Mountain

Our patented OPI 3D forging process enables us to build hollow, seamless crankarms that are not only extremely light but also incredibly strong and stiff. In fact, they are the stiffest, strongest crankarms we've ever made. Lighter and stiffer than the competition and completely compatible with every HollowGram spider and chainring set-up, the HollowGram Si cranks bring top-level performance to more pricepoints.

Code

CU40386532	Hollowgram Si 165 32 SpideRing
CU40387032	Hollowgram Si 170 32 SpideRing
CU40387532	Hollowgram Si 175 32 SpideRing



OPI 1x MTB Spidering

Ultralight, durable SpideRing tech for the MTB world. 10-arm, radial arm design with X-Synch thick/thin tooth profiles for chain retention and only 46 grams (30t). The crankarm interface on these rings is not keyed, so the rings can be rotated 90 degrees for maximum longevity.

Code

CU4041AI30	Spiderring 30 Ai
CU4041AI32	Spiderring 32 Ai
CU4041AI34	Spiderring 34 Ai
CU4041SI44	Spiderring 44



OPI Spidering SL

The original SpideRing. Featuring a 3D-forged, 10-arm design and obsessive weight-saving machining throughout, this spider/rings combo is the best shifting ultralight chainring set on the market. Available in 53/39, 52/36 and 50/34 chainring combinations. Weight: 160 grams (50/34)

Code

oouc	
CU4042SI53	Spiderring 53/39 Si
CU4042SI52	Spiderring 52/36 Si
CU4042SI50	Spiderring 50/34 Si







cannondale

© 2019 PSI CYCLING www.canondale.com